

INSTALLATION GUIDE

DI 020 EN B

TURBOTRONIQUE TYPE MTS-xx AND MTP-xx

Described in EU-type examination certificate N°: LNE-26664



B	2018/02/08	Modification of the assignment of the extension board 'sonde AD' 2 wires [PJV128], Updating of drawings	DSM	XS
A	2017/11/09	Creation [PJV126]	DSM	PJ
Issue	Date	Nature of modifications	Written by	Approved by

ALL RECOMMENDATIONS ARE FOR REFERENCE ONLY				
THIS DOCUMENT IS THE PROPERTY OF ALMA. IT CAN BE NEITHER COPIED NOR COMMUNICATED TO ANY THIRD PARTIES WITHOUT ALMA AUTHORIZATION				
	INSTALLATION GUIDE DI 020 ENB TURBOTRONIQUE TYPE MTS-xx AND MTP-xx			Units of measure: Length: mm Angle: degree (° ' ") Temperature: °C
	This document is available at www.alma-alma.fr			Page 1 / 41

CONTENTS

1. GENERAL RECOMMENDATIONS	3
1.1. MECHANICAL RECOMMENDATIONS	3
1.2. ELECTRICAL RECOMMENDATIONS	4
1.3. PNEUMATIC RECOMMENDATIONS	6
2. GENERAL PRESENTATION.....	7
2.1. USE ACCORDING TO MID CERTIFICATE	7
2.2. SPECIAL CONDITIONS FOR INSTALLATION	7
3. PART LIST	8
4. OVERALL DRAWING OF THE TURBOTRONIQUE MEASURING SYSTEM	10
5. MICROCOMPT+ TURBOTRONIQUE NON ATEX OR ATEX.....	12
5.1. CALCULATOR-INDICATOR MICROCOMPT+ NON ATEX.....	12
5.2. CALCULATOR-INDICATOR MICROCOMPT+ ATEX	13
5.3. INSTALLATION RECOMMENDATIONS CALCULATOR-INDICATOR MICROCOMPT+	14
5.4. ELECTRICAL WIRING CALCULATOR-INDICATOR MICROCOMPT+.....	15
Terminal assignment of the interface power supply board	16
Connection of plexmi electronic boards for manifold flaps and product returns	18
Terminal assignment of the extension board 'sonde AD' 5 wires (IS)	20
Terminal assignment of the extension board 'sonde AD' 2 wires	21
5.5. SPOOL VALVE CONTROL: ELECTRICAL AND HYDRAULIC WIRING	22
Terminal assignment of the relay extension board.....	24
6. ADRIANE TURBINE METER.....	25
6.1. ADRIANE TURBINE METER DN50-50 243 100x100.....	25
6.2. ADRIANE TURBINE METER DN80-80 243 110x110.....	26
6.3. ADRIANE TURBINE METER DN80-80 373 PN16 ADBLUE®	27
6.4. INSTALLATION AND SEALING RECOMMENDATIONS ADRIANE TURBINE METER.....	28
7. PRINTER	29
7.1. INSTALLATION RECOMMENDATIONS PRINTER	30
8. CONVERTER 24VDC/24VDC 2.1A 50W.....	31
9. NON-RETURN VALVE KIT DN50 OR DN80.....	32
9.1. INSTALLATION RECOMMENDATIONS NON-RETURN VALVE KIT DN50 OR DN80	33
10. SIGHTGLASS KIT DN50 OR DN80.....	34
10.1. INSTALLATION RECOMMENDATIONS SIGHTGLASS KIT DN50 OR DN80.....	35
11. CONNECTION KIT 100X100 DN50 OR DN80	36
12. NC/NO SOLENOID VALVES KIT NON ATEX OR ATEX.....	37
12.1. NC/NO SOLENOID VALVES KIT NON ATEX	37
12.2. NC/NO SOLENOID VALVES KIT ATEX	38
13. TEMPERATURE PROBE PT100 – CT1001 ATEX	39
13.1. INSTALLATION RECOMMENDATIONS TEMPERATURE PROBE.....	40
14. KIT FOR MEASURING SYSTEM IDENTIFICATION PLATE	41

ALL RECOMMENDATIONS ARE FOR REFERENCE ONLY		
THIS DOCUMENT IS THE PROPERTY OF ALMA. IT CAN BE NEITHER COPIED NOR COMMUNICATED TO ANY THIRD PARTIES WITHOUT ALMA AUTHORIZATION		
	INSTALLATION GUIDE DI 020 EN B TURBOTRONIQUE TYPE MTS-xx AND MTP-xx	Units of measure: Length: mm Angle: degree (° ' ") Temperature: °C
	This document is available at www.alma-alma.fr	Page 2 / 41

1. GENERAL RECOMMENDATIONS

IN ORDER TO AVOID ALL THE PROBLEMS CONCERNING THE INSTALLATION, THE OPERATION AND THE MAINTENANCE OF THE EQUIPMENTS, BEING ABLE TO CREATE INOPPORTUNE FAILURE, PLEASE RESPECT THE FOLLOWING RECOMMENDATIONS.

BEFORE ANY WORK, MAKE SURE THAT THE EQUIPMENTS ARE NOT POWERED.


1.1. MECHANICAL RECOMMENDATIONS

- ⇒ Respect the recommendations of the instruction manual specifying the installation, operation and maintenance conditions of the ATEX equipment (instruction manual supplied with the equipment).
- ⇒ Take care to place the equipment in order to facilitate their installation, operation and maintenance by the technicians (working ergonomics).
- ⇒ Take care to position properly the equipment; the display must be readable without any difficulty.
- ⇒ Apply a tightening torque suitable with size and material of the fixation element except particular specifications mentioned on the presentation drawing or in the installation guides.
- ⇒ Mechanically protect the cables with the corrugated conduit if the cables are not ADR (corrugated conduit adapted to vehicles used for "carriage of dangerous goods of road" - hydrocarbons, LPG ... - and meet the requirements of French standard NF R13-903).
- ⇒ Ensure there are a good mechanical strength and a good sealing between cable glands and cables, and between cable glands and corrugated conduit.
- ⇒ Respect cables and corrugated conduit radii of curvature.
- ⇒ Leave enough flexibility to wires in order to avoid any risk of stripping.
- ⇒ Allow the drainage of the water in the lower loop (siphon) of the corrugated conduit (not water retention inside the corrugated conduit).

ALL RECOMMENDATIONS ARE FOR REFERENCE ONLY		
THIS DOCUMENT IS THE PROPERTY OF ALMA. IT CAN BE NEITHER COPIED NOR COMMUNICATED TO ANY THIRD PARTIES WITHOUT ALMA AUTHORIZATION		
	INSTALLATION GUIDE DI 020 EN B TURBOTRONIQUE TYPE MTS-xx AND MTP-xx	Units of measure: Length: mm Angle: degree (° ' ") Temperature: °C
	This document is available at www.alma-alma.fr	Page 3 / 41

1.2. ELECTRICAL RECOMMENDATIONS

- ⇒ Respect the recommendations of the instruction manual specifying the installation, operation and maintenance conditions of the ATEX equipment (instruction manual supplied with the equipment).
- ⇒ Connect the supply of the equipment downstream cut-out, on the power supply reserved to the measured distribution.
- ⇒ Put a delayed protection of 5A upstream the 24VDC supply to protect equipment in case of reverse polarity or overcurrent.
- ⇒ Use ADR specific cable, if it is not the case, use at minimum a cable resisting to hydrocarbons. Mechanically protect this cable with a corrugated conduit (corrugated conduit adapted to vehicles used for "carriage of dangerous goods by road" - hydrocarbons, LPG ... - and meet the requirements of French standard NF R13-903).
- ⇒ Take care not to damage the terminals of the different electronic boards while wiring.
 - Screw terminals: do not damage the screw heads of the terminals.
 - Use insulated lugs and insulated wire ferrules adapted to the section of wires.
 - Spring terminals: do not block the springs (if a spring is blocked, the electronic board must be replaced).
 - Use flat screwdriver 0.4x2.5 (see fig.1).
 - Insert the screwdriver slightly tilted, then push it perpendicularly to the terminal.
 - Do not exceed the upright position when the screwdriver is down in order not to block the spring.
 - Insert or remove the wire and remove the screwdriver.
- ⇒ Pass the power supply cores (24VDC truck) through the ferrites by carrying out a loop (ALMA supply).
- ⇒ Do not use wires of section higher than 1.5mm².
- ⇒ Do not insert more than two wires in a terminal, if necessary use an insulated twin wire ferrule (unless otherwise indicated).
- ⇒ Strictly respect the polarities of the input/output when wiring, in accordance with serigraphy on the cards and/or with the installation guide indications.
- ⇒ Whenever possible, perform a wired test, after wiring and before powering.
- ⇒ Whenever possible, respect the locations of the cables specified in the installation guide.
- ⇒ Equipment must be connected to the frame ground (external ground connection).
- ⇒ Whenever possible, use shielded cables with a 360° connection through the metal cable glands (see the documentation delivered with the equipment).
Otherwise, connect the shields to devices inside the equipment (ground terminal, earth bar, earth boss...).
- ⇒ Whenever possible, label the cables and cores according to the installation guide to facilitate the later maintenance operations.
- ⇒ Respect a homogeneous wire color code.



ALL RECOMMENDATIONS ARE FOR REFERENCE ONLY		
THIS DOCUMENT IS THE PROPERTY OF ALMA. IT CAN BE NEITHER COPIED NOR COMMUNICATED TO ANY THIRD PARTIES WITHOUT ALMA AUTHORIZATION		
	INSTALLATION GUIDE DI 020 EN B TURBOTRONIQUE TYPE MTS-xx AND MTP-xx	Units of measure: Length: mm Angle: degree (° ' ") Temperature: °C
	This document is available at www.alma-alma.fr	Page 4 / 41

⇒ Printer TMU295: before positioning the printer on its support, check that configuration switches of the data link protocol, located under the printer, are well positioned: No3 on 'ON' and the 7 others on 'OFF'.

⇒ Current of the electrical devices:

Electrical devices	Supply voltage	Minimum current	Maximum current
MICROCOMPT+	24VDC +/-10%	0.7 A	1.5 A
PRINTER	24VDC +/-10%	0.1 A	5.5 A (switch-on)

⇒ Color code according to DIN 47100.

⇒ Code for designation of colours according to IEC 60757 (except FR codes):

FR				EN	IT	ES	DE
Couleurs	Codes		Standard codes CEI 60757	Colours	Colori	Colores	Farbe
Blanc	Bc		WH	White	Bianco	Blanco	Weiß
Marron	Mr		BN	Brown	Marrone	Marrón	Braun
Vert	Vt		GN	Green	Verde	Verde	Grün
Jaune	Jn		YE	Yellow	Giallo	Amarillo	Gelb
Gris	Gr		GY	Grey	Grigio	Gris	Grau
Rose	Rs		PK	Pink	Rosa	Rosa	Lila
Bleu	Bl		BU	Blue	Blu	Azul	Blau
Rouge	Rg		RD	Red	Rosso	Rojo	Rot
Noir	Nr		BK	Black	Nero	Negro	Schwarz
Violet	Vi		VL	Violet	Viola	Violeta	Violett
Orange	Or		OG	Orange	Arancio	Naranja	Orange
Vert/Jaune	V/J		GYE	Green/Yellow	Verde/Giallo	Verde/Amarillo	Grün/Gelb

ALL RECOMMENDATIONS ARE FOR REFERENCE ONLY

THIS DOCUMENT IS THE PROPERTY OF ALMA. IT CAN BE NEITHER COPIED NOR COMMUNICATED TO ANY THIRD PARTIES WITHOUT ALMA AUTHORIZATION



INSTALLATION GUIDE DI 020 EN B TURBOTRONIQUE TYPE MTS-xx AND MTP-xx

This document is available at www.alma-alma.fr

Units of measure:
Length: mm
Angle: degree (° ' ")
Temperature: °C

Page 5 / 41

1.3. PNEUMATIC RECOMMENDATIONS

- ⇒ Air must be filtered – from 40 to 20µm. Specific recommendations may be added in the installation guides or on the presentation drawings.
- ⇒ The air lubrication must be permanent and correct to avoid any damage on the pneumatic components.
- ⇒ The air supply pressure to the inlet of the equipment must be at least 6 bar and max 8 bar. Specific recommendations may be added in the installation guides or on the presentation drawings.
- ⇒ The pneumatic supply pipes (6/4) must be cut straight (no slanting cut) and should not be crushed after cutting to prevent leakage on fittings.
- ⇒ Respect the radii of curvature of the pneumatic pipes indicated by the manufacturer.
- ⇒ Use colored pneumatic pipes to ease maintenance operation.
- ⇒ In no case the exhaust holes of the pneumatic organs should be plugged, obstructed, unless if that is clearly specified in the installation guides or on presentation drawings.
- ⇒ The use of muffler is not allowed under any circumstances (fouling, frost...). Put a pneumatic pipe of sufficient length, pointed downwards, so that its end is placed in a protected area (L = 100 mm min.).
- ⇒ Pressure unit conversion:

PRESSURE UNIT CONVERSION				
Unités	Bar	PSI	Pascal	kg/cm ²
1 Bar =	1	14,5	100 000 (1x10 ⁵)	1,0197
1 PSI =	0.069	1	6894,5	0,07031
1 Pascal =	1x10 ⁻⁵	14,5x10 ⁻⁵	1	1,0197x10 ⁻⁵
1 kg/cm ² =	0,98	14,22	98066,5	1

PSI = Pound per Square Inch (livre par pouce carré)

1 bar = 100 kPa = 0.1 MPa (1 MPa = 10 bar)

ALL RECOMMENDATIONS ARE FOR REFERENCE ONLY		
THIS DOCUMENT IS THE PROPERTY OF ALMA. IT CAN BE NEITHER COPIED NOR COMMUNICATED TO ANY THIRD PARTIES WITHOUT ALMA AUTHORIZATION		
	INSTALLATION GUIDE DI 020 EN B TURBOTRONIQUE TYPE MTS-xx AND MTP-xx	Units of measure: Length: mm Angle: degree (° ' ") Temperature: °C
	This document is available at www.alma-alma.fr	Page 6 / 41

2. GENERAL PRESENTATION

2.1. USE ACCORDING TO MID CERTIFICATE

The measuring system TURBOTRONIQUE type MTS-xx or MTP-xx is covered by the EU type examination certificate N° LNE-26664. Refer to this certificate for any precision about its installation. For the sealing plan, see Annex to EU type examination certificate N° LNE-26664.

2.2. SPECIAL CONDITIONS FOR INSTALLATION

- ⇒ The ALMA model TURBOTRONIQUE measuring systems should be installed on road tankers.
- ⇒ The installation of the measuring system covered by this certificate must be in conformity with the plan which is presented in § “securing and sealing” of the certificate.
- ⇒ If the measuring system is fitted with two delivery points, it has to be equipped with a positive security device enabling a liquid delivery by only one point at once.
- ⇒ The measuring system can be equipped with an additive injection device. This injection has to occur upstream of the meter. If the additive injection is situated downstream of the gas elimination device, the installation has to avoid air injection by means of positive safety detection device, sealed and placed at the low level of the additive tank, which stops injection in case of additive lack.
- ⇒ The measuring system may be fitted with OPW, ALPECO, or EMCO WHEATON product return devices, as well as with a magnetic valve for venting, associated with the wind concentrator enabling product transfers towards the compartments. This has to be installed so that no air or venting of the wind concentrator may occur during delivery.
- ⇒ If a printing device not covered by an evaluation certificate is connected to the ALMA electronic calculator-indicator, a notice stating that the data printed is not subject to legal control must be clearly printed on the delivery notes.
- ⇒ The special installation conditions of the gas elimination devices FSGB48E, SG 80.1 AL, SG 80 IN PERNIN EQUIPEMENTS and FS24 SATAM are defined in the relevant evaluation certificates.
- ⇒ It is mandatory to install a non-return valve on the pipe between the gas elimination device and the transfer point. The non-return valve may be placed and sealed upstream of the meter or downstream as well.
Otherwise, if the liquid level in the gas elimination device may be lower than the liquid level in the meter, a non-return valve has to be installed at the device outlet, or placed and sealed between the device and the meter.
- ⇒ The hose allowing gas removal at the outlet of the gas elimination device has to be non-pinchable or keep the deformation mark.
- ⇒ The special installation conditions of the meters are defined in evaluation certificates LNE-12393.


ALL RECOMMENDATIONS ARE FOR REFERENCE ONLY		
THIS DOCUMENT IS THE PROPERTY OF ALMA. IT CAN BE NEITHER COPIED NOR COMMUNICATED TO ANY THIRD PARTIES WITHOUT ALMA AUTHORIZATION		
	INSTALLATION GUIDE DI 020 EN B TURBOTRONIQUE TYPE MTS-xx AND MTP-xx	Units of measure: Length: mm Angle: degree (° ' ") Temperature: °C
	This document is available at www.alma-alma.fr	Page 7 / 41

3. PART LIST

EQUIPMENTS INCLUDED IN THE MEASURING SYSTEM DELIVERED BY ALMA				
Item	Equipment	Designation	Qty	Option*
1		CALCULATOR INDICATOR MICROCOMPT+ TURBOTRONIQUE NON ATEX or ATEX (Provided with a magnetic or RFID supervisor key)	1	
2	2a 	ADRIANE TURBINE METER DN50-50 or DN80-80 (Depending on configuration)	1	
	2b 	ADRIANE TURBINE METER DN80-80 373 PN16 Adblue® (Only for TURBOTRONIQUE Adblue®)		
3		PRINTER TMU-295 (Printer – power supply cable – serial link cable 10m)	1	
4		CONVERTER 24VDC/24VDC 2.1A 50W (Printer power supply 24VDC)	1	
5		NON-RETURN VALVE KIT DN50 or DN80 (Depending on configuration)	1	●

Non-contractual pictures


ALL RECOMMENDATIONS ARE FOR REFERENCE ONLY		
THIS DOCUMENT IS THE PROPERTY OF ALMA. IT CAN BE NEITHER COPIED NOR COMMUNICATED TO ANY THIRD PARTIES WITHOUT ALMA AUTHORIZATION		
	INSTALLATION GUIDE DI 020 EN B TURBOTRONIQUE TYPE MTS-xx AND MTP-xx	Units of measure: Length: mm Angle: degree (° ' ") Temperature: °C
	This document is available at www.alma-alma.fr	Page 8 / 41

MATERIELS CONSTITUANT L'ENSEMBLE DE MESURAGE LIVRE PAR ALMA				
Item	Matériel	Désignation	Qté	Option*
6		SIGHTGLASS KIT DN50 or DN80 FOR ADRIANE TURBINE METER (Depending on configuration) (Supplied with pre-drilled screws for sealing)	1	•
7		CONNECTION KIT DN50 or DN80 (Depending on configuration) (Supplied with pre-drilled screws for sealing)	1	•
8		NC/NO SOLENOID VALVES KIT NON ATEX or ATEX	1	•
9		Pt100 TEMPERATURE PROBE – CT1001-Pe ATEX (Supplied with thermowell)	1	•
10		KIT FOR MEASURING SYSTEM IDENTIFICATION PLATE (Plate and sealing device)	1	•
Option*: equipment sold as an option by ALMA must be installed on the measuring system if required by the certificate.				

Non-contractual pictures

ALL RECOMMENDATIONS ARE FOR REFERENCE ONLY		
THIS DOCUMENT IS THE PROPERTY OF ALMA. IT CAN BE NEITHER COPIED NOR COMMUNICATED TO ANY THIRD PARTIES WITHOUT ALMA AUTHORIZATION		
	INSTALLATION GUIDE DI 020 EN B TURBOTRONIQUE TYPE MTS-xx AND MTP-xx	Units of measure: Length: mm Angle: degree (° ' ") Temperature: °C
	This document is available at www.alma-alma.fr	Page 9 / 41

4. OVERALL DRAWING OF THE TURBOTRONIQUE MEASURING SYSTEM

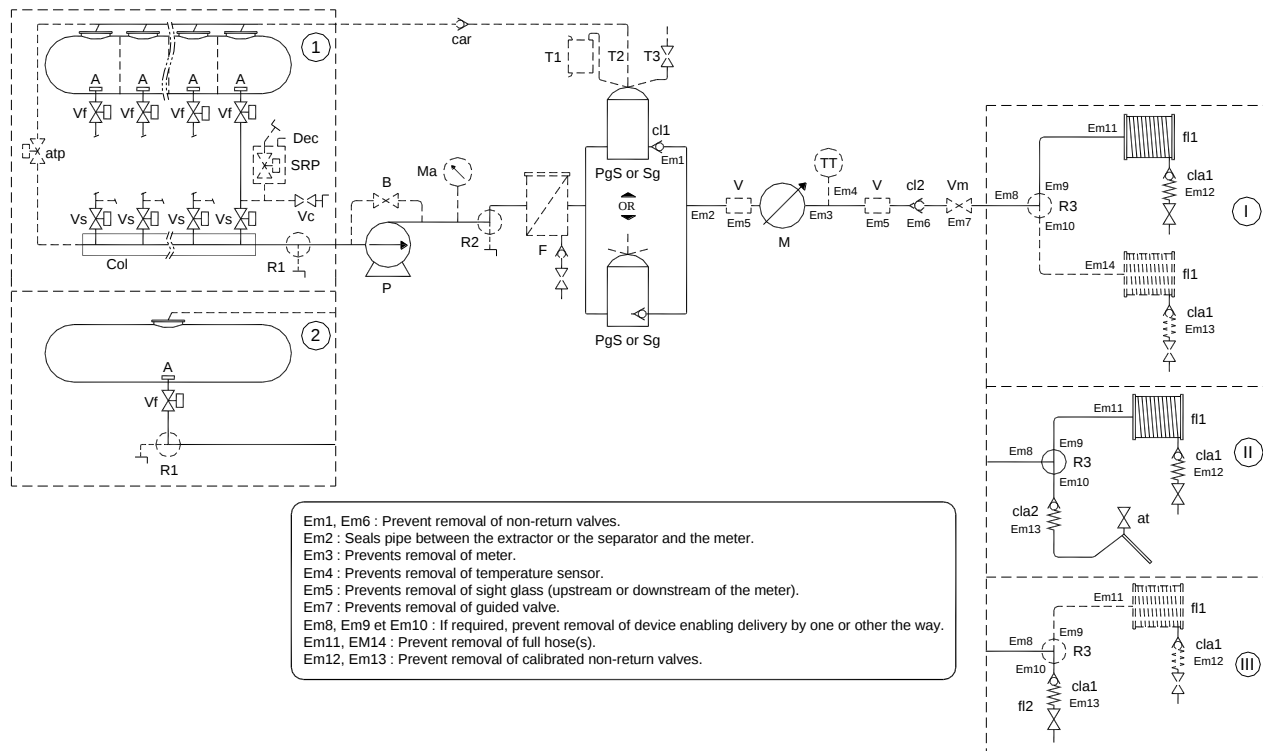

- A: Anti-swirl device.
 R1: Two-way cock enabling delivery per meter, draining and filling of the tank without using the meter (optional).
 P: The pump may be reversible. In that case, a non-return valve has to be added between cock R2 and gas separator Sg.
 B: Pump bypass
 Ma: Manometer indicating the forcing back pressure of the pump (optional).
 R2: Two-way cock for pumped delivery without meter (optional).
 F: Filter which, when external to the separator or the extractor, may be fitted with a draining cock.
 Sg: Gas separator.
 PgS: Specific gas extractor.
 cl1: Non-return valve (compulsory when the gas elimination device is not fitted with internal non-return valve).
- T1, T2, T3: Variants authorized for gas evacuation device:
T1: Use of a container to retrieve the liquid particles carried along by gas,
T2: Foam going back to the tank,
T3: Use of a valve for draining.
- car: Non-return valve on foam return (optional).
 M: Meter
 V: Sight glass (compulsory with a specific gas extractor (gas indicator), optional with a gas separator).
 cl2: Non-return valve (optional).
 TT: Temperature sensor Pt100 (optional).
 Vm: Guided valve (optional).
 R3: Device enabling, when the measuring system has two delivery paths, to make deliveries one or the other way.
 fl1: Full hose on hose reel
 fl2: Very short full hose enabling delivery with flowrate (optional).
 cla1: Calibrated non-return valve preventing draining of the full hose.
 cla2: Calibrated non-return valve preventing draining of the empty hose.

ALL RECOMMENDATIONS ARE FOR REFERENCE ONLY

THIS DOCUMENT IS THE PROPERTY OF ALMA. IT CAN BE NEITHER COPIED NOR COMMUNICATED TO ANY THIRD PARTIES WITHOUT ALMA AUTHORIZATION



INSTALLATION GUIDE DI 020 EN B TURBOTRONIQUE TYPE MTS-xx AND MTP-xx

This document is available at www.alma-alma.fr

Units of measure:
 Length: mm
 Angle: degree (° ' ")
 Temperature: °C

Page 10 / 41

I, II, III: Variant of the delivery device:

Variant I: One or two full hoses with reel,

Variant II: Combination of full hose on reel and empty hose,

Variant III: Combination of short full hose and full hose on reel, if applicable.

Vf: Valve for compartment bottom.

Col: Wind concentrator.

atp: Guided venting (optional).

Vs: Selection valve, installed on pipe of each compartment, enabling communication with wind concentrator (guided or manual).

Vc: Valve for source loading, installed on pipe of each compartment (optional).

SRP: Return Product System on one or more compartment(s) (optional).

Déc: Decompression control (secured).

1, 2: Variants of devices associated with the tank

Variant 1: Tank with several compartments and wind concentrator,

Variant 2: Single compartment tank.

ALL RECOMMENDATIONS ARE FOR REFERENCE ONLY		
THIS DOCUMENT IS THE PROPERTY OF ALMA. IT CAN BE NEITHER COPIED NOR COMMUNICATED TO ANY THIRD PARTIES WITHOUT ALMA AUTHORIZATION		
	INSTALLATION GUIDE DI 020 EN B TURBOTRONIQUE TYPE MTS-xx AND MTP-xx	Units of measure: Length: mm Angle: degree (° ' ") Temperature: °C
	This document is available at www.alma-alma.fr	Page 11 / 41



5.2. CALCULATOR-INDICATOR MICROCOMPT+ ATEX



Document available on website alma-alma.fr

ALL RECOMMENDATIONS ARE FOR REFERENCE ONLY

THIS DOCUMENT IS THE PROPERTY OF ALMA. IT CAN BE NEITHER COPIED NOR COMMUNICATED TO ANY THIRD PARTIES WITHOUT ALMA AUTHORIZATION



INSTALLATION GUIDE DI 020 ENB TURBOTRONIQUE TYPE MTS-xx AND MTP-xx


This document is available at www.alma-alma.fr

Units of measure:
 Length: mm
 Angle: degree (° '' ''')
 Temperature: °C


Page 13 / 41

5.3. INSTALLATION RECOMMENDATIONS CALCULATOR-INDICATOR MICROCOMPT+


- Fasten the box with 4 M6 screws (holder suitable for vibrations and designed to support the MICROCOMPT). On the box: 4 M6 blind holes tapped length=12 over 185x132).
- Leave an open space around the box in order:
 - o To facilitate maintenance operation.
 - o To prevent any pressing on pushbuttons and on the glass.
- The space between the front face of the box and the cabinet door shall be sufficient.
- Dimensions: $A > 100\text{mm}$ and $B > 60\text{mm}$

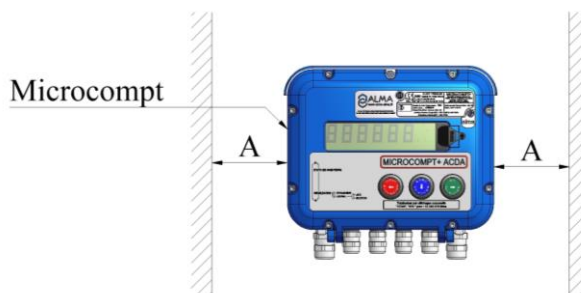

- SOLUTION 1: straight box if it's a breast height.




Left hand view
Closed box




Left hand view
open box

- SOLUTION 2: 20° angle if it's not at breast height.



Left hand view
Closed box



Left hand view
open box

REFER TO THE INSTRUCTION MANUAL
(DELIVERED WITH THE EQUIPMENT OR AVAILABLE ON ALMA WEBSITE)

ALL RECOMMENDATIONS ARE FOR REFERENCE ONLY


THIS DOCUMENT IS THE PROPERTY OF ALMA. IT CAN BE NEITHER COPIED NOR COMMUNICATED TO ANY THIRD PARTIES WITHOUT ALMA AUTHORIZATION



INSTALLATION GUIDE DI 020 EN B TURBOTRONIQUE TYPE MTS-xx AND MTP-xx

This document is available at www.alma-alma.fr

Units of measure:
Length: mm
Angle: degree (° ' ")
Temperature: °C

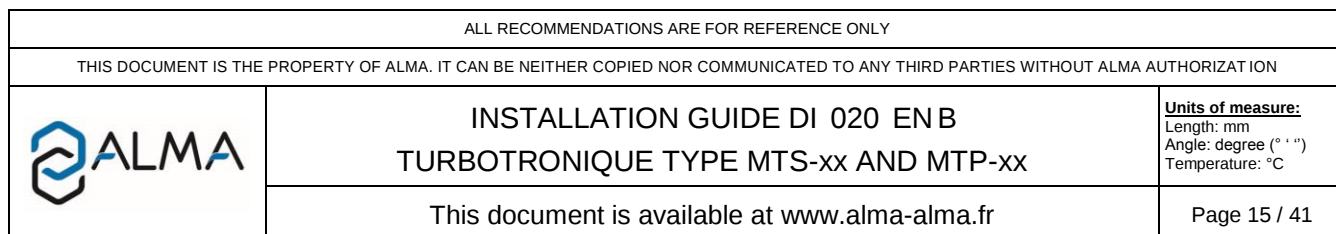


Terminal assignment of the interface power supply board

Any mass braids and shielding must be connected to the MICROCOMPT+ ground bar

TERMINAL ASSIGNMENT OF MICROCOMPT+ BOARDS

INTERFACE POWER SUPPLY BOARD

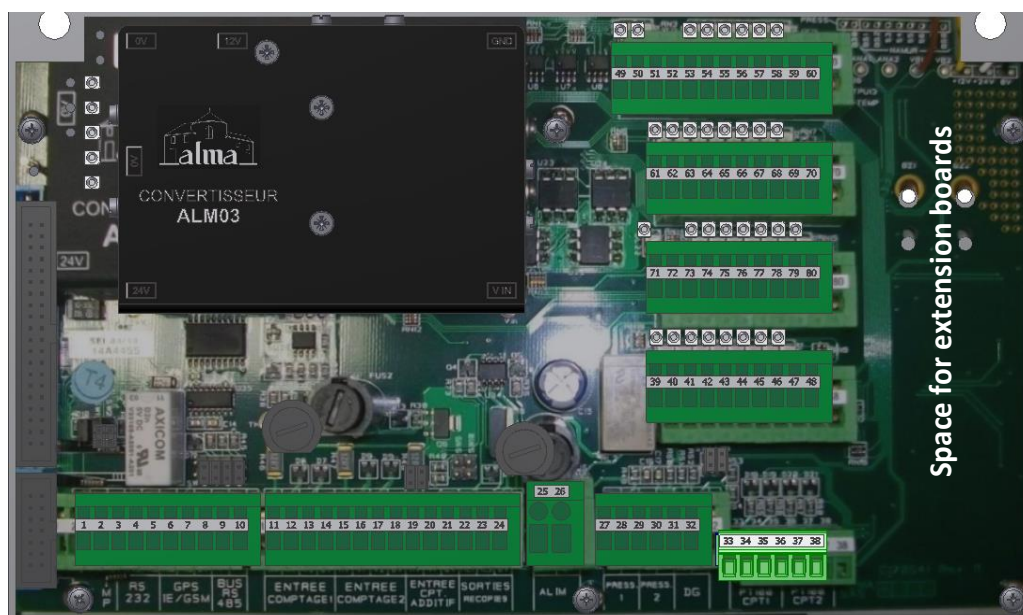

EQUIPMENTS CONNECTED TO THE MICROCOMPT+								INTERFACE POWER SUPPLY BOARD			
Option	Equipment	Cable (for information)				Function	Colour or No.	Terminal	Function		Observation
		No.	CG*	Alma	Type						
	PRINTER	C1	1/2"NPT	●	ADR 4x0.34 sh.	Rx Printer	Bc	1	Tx	PRINTER	Connect the shielding
						Tx Printer	Mr	2	Rx		
						0V	Vt	3	0V		
•	EMBEDDED COMPUTING	C8	1/2"NPT		3x0.34 sh.	0V		3	0V	RS232	Connect the shielding. ALMA or FTL Light Protocol
						Rx E.C.		4	Tx		
						Tx E.C.		5	Rx	DSPGI	Gauging system for product identification
•	DSPGI DEVICE					Rx	Vt	6	Tx		
						Tx	Bc	7	Rx		
						Ground	Nr	8	Ground	RS485	Remote display type SREI TC5-10-24 Ext Use an RS485/RS232 converter
•	REMOTE DISPLAY					Tx		9	+		
						Rx		10	-	INPUT TURBINE EMA	Connect the shielding
	TURBINE TRANSMITTER	C2	1/2"NPT	●	ADR 4x0.34 sh.	12V	Jn	11	12V		
						V1	Mr	12	V1		
						V2	Vt	13	V2		
						0V	Bc	14	0V	INPUT ADDITIVE METERING	
•	ADDITIVE INJECTOR METERING							19	PO EMA		
								20	PO EMB		
								21	0V	PULSES OUTPUT	
•	PULSES OUTPUT		1/2"NPT			PO EMA		22	12V		
						PO EMB		23	V1		
						0V		24	0V	POWER SUPPLY	24VDC truck battery (after battery switch and protected by a fuse)
	SUPPLY 24VDC	A1	1/2"NPT		2x1	Bat. (+)	1	25	24VDC		
						Bat. (-)	2	26	0V		

ALL RECOMMENDATIONS ARE FOR REFERENCE ONLY

THIS DOCUMENT IS THE PROPERTY OF ALMA. IT CAN BE NEITHER COPIED NOR COMMUNICATED TO ANY THIRD PARTIES WITHOUT ALMA AUTHORIZATION



INSTALLATION GUIDE DI 020 ENB TURBOTRONIQUE TYPE MTS-xx AND MTP-xx

This document is available at www.alma-alma.fr

Units of measure:
Length: mm
Angle: degree (° ' ")
Temperature: °C

Page 16 / 41

EQUIPMENTS CONNECTED TO THE MICROCOMPT+								INTERFACE POWER SUPPLY BOARD				
Option	Equipement	Cable (for information)				Function	Colour or No.	Terminal	Function		Observation	
		No.	CG*	Alma	Type							
●	Pt100 TEMPERATURE PROBE	C4	1/2"NPT	●	ADR 3x0.6 sh.	+	Jn	33	+	Pt100	Connect the shielding	
						-	Bc	34	-			
						-	Vt	35	-			
	MANIFOLD FLAP CONTROL OR PRODUCT RETURN AUTHORISATION AND/OR ADDITIVATION 2 CONTROL				4 to 7x1	Flap 1	1	39	24VDC = opened flap (outputs FET 24V 5W max.) FET=Field Effect Transistor	EV Flaps or Product return and/or Additivition 2	Depending on configuration: direct connection or via plexmi electronic board. Refer to the assignment table and the connection table of the relevant plexmi board	
						Flap 2	2	40				
						Flap 3	3	41				
						Flap 4	4	42				
						Flap 5	5	43				
						Flap 6	6	44				
						Flap 7	7	45				
								46				
	1x1	0V		47	0V							
				48								
	RC-HEATING OIL RECEIVER			2x1	Start/Stop	1	49	Start/Stop	RC- Oil_1			
					LF/HF	2	50	LF/HF	RC- Oil_2			
	COUNTED / PUMPED DISTRIBUTION WAY (with additional commands)			3x1	Gravi/Pmp	1	51	0V	Gravity / Pumped	Closed circuit=product pumped (end position)		
					Pct/Pnc	2	52	0V	Pumped counted/ no counted	Closed circuit=product counted		
					0V	3	59	0V	0V (GND)	51, 52 and 59 are shunted if manual valves are not instrumented		
	PTO CONTROL				1x1	PTO Ctrl		58		PTO control	Power- take- off engaged	
	FOOTVALVE CONTROL				1x1	Footvalve		64	24VDC= cde	FOOTVALVE	24VDC=opening (Outputs FET 24V 5W max.) FET=Field Effect Transistor	
	PRODUCT RETURN CONTROL			3 to 6X1	PR1	1	65	24VDC= author.	Return_1	Depending on configuration: direct connection (Outputs FET Field Effect Transistor 24V 5W max.) or via plexmi electronic board. Refer to the assignment table and connection table of the relevant plexmi board		
					PR2	2	66		Return_2			
					PR3	3	67		Return_3			
					Chasse		68		Cde chasse			
	HOSES 1 AND 2 AUTHORISATION CONTROL	C6		3x1	0V	1	70	0V	0V (GND)	Hoses 1and 2 authorisation control (Outputs FET 24V 5W max.) FET=Field Effect Transistor		
					Hose 1	2	75	24VDC= distrib.	Hose_1ctrl			
					Hose 2	3	63		Hose_2 ctrl			
	ADDITIONAL COMMANDS			5X1	PTO	1	61	24VDC= pto	PTO	(Outputs FET 24V 5W max.) FET=Field Effect Transistor		
					Stop Mot.	2	62	24VDC= stop	Stop motor			
					Acc. Mot.	3	73	24VDC= acc.	Motor acceleration			
					Clutching	4	76	24VDC= clutchin	Clutching			
					Start Mot.	5	77	24VDC= start	Start motor			
	ADDITIVATION 1 CONTROL			2x1	Power	1	71	NO free contact	Additivition 1	Closed contact=additivition (Output: NO free potential relay)		
					Control	72	72					
●	KIT SOLENOID VALVES NC/NO (NON ATEX or ATEX)	C5		●	[3xG0.75]	NC valve Pump bypass	1 / [Mr]	74	24VDC	NC control	24VDC= opening NC solenoid valve 24VDC= closing NO solenoid valve [cable supplied by ALMA for ATEX version]	
							2 / [NI]	80	0V			
						NO valve Exhaust	1 / [Mr]	79	24VDC	NO control		
							2 / [NI]	80	0V			
	MANIFOLD VENT VALVE CONTROL				1x1	Vent valve		78	24VDC	Vent valve control	24VDC=opening (Outputs FET 24V 5W max.) FET=Field Effect Transistor	
SOME EXTENSION BOARDS MAY BE SET ON TO THE INTERFACE POWER SUPPLY BOARD												
*Refer to the Cable Glands Installation Instructions												

*Refer to the Cable Glands Installation Instructions


ALL RECOMMENDATIONS ARE FOR REFERENCE ONLY		
THIS DOCUMENT IS THE PROPERTY OF ALMA. IT CAN BE NEITHER COPIED NOR COMMUNICATED TO ANY THIRD PARTIES WITHOUT ALMA AUTHORIZATION		
	INSTALLATION GUIDE DI 020 EN B TURBOTRONIQUE TYPE MTS-xx AND MTP-xx	Units of measure: Length: mm Angle: degree (° ' ") Temperature: °C
	This document is available at www.alma-alma.fr	
		Page 17 / 41

Assignments table according to number of flaps, product returns and depending on the presence or not of a second additive injector:

				MICROCOMPT+ Interface power supply board V1 REV11									
Nb of Flaps	Nb of Returns	Addit #1	Addit #2	45	44	43	42	41	40	39	67	66	65
5	0-4	yes	yes	addit#2	ret#4	flap#5	flap#4	flap#3	flap#2	flap#1	ret#3	ret#2	ret#1
5	5	yes	no	ret#5	ret#4	flap#5	flap#4	flap#3	flap#2	flap#1	ret#3	ret#2	ret#1
6	0-3	yes	yes	addit#2	flap#6	flap#5	flap#4	flap#3	flap#2	flap#1	ret#3	ret#2	ret#1
6	4	yes	no	ret#4	flap#6	flap#5	flap#4	flap#3	flap#2	flap#1	ret#3	ret#2	ret#1
6	5-7	yes	yes	addit#2	flap#6	flap#5	flap#4	flap#3	flap#2	flap#1	PLEXMI 1 (ret#1-ret#7)		
7	0-3	yes	no	flap#7	flap#6	flap#5	flap#4	flap#3	flap#2	flap#1	ret#3	ret#2	ret#1
7	4-7	yes	no	flap#7	flap#6	flap#5	flap#4	flap#3	flap#2	flap#1	PLEXMI 1 (ret#1-ret#7)		
8	0-6	yes	no	ret#6	ret#5	ret#4	flap#8	PLEXMI 1 (flap #1- flap#7)			ret#3	ret#2	ret#1
9	0-5	yes	no	ret#5	ret#4	flap#9	flap#8	PLEXMI 1 (flap#1- flap#7)			ret#3	ret#2	ret#1
9	6-9	yes	no	ret#9	ret#8	flap#9	flap#8	PLEXMI 1 (flap#1- flap#7)			PLEXMI 2 (ret#1-ret#7)		

If both PLEXMI electronic boards are useful, PLEXMI 1 is fixed to the MICROCOMPT+ frame and PLEXMI 2 (ret#1-ret#7) has to be installed in a 24VDC-supplied independent box.

Connection of plexmi electronic boards for manifold flaps and product returns

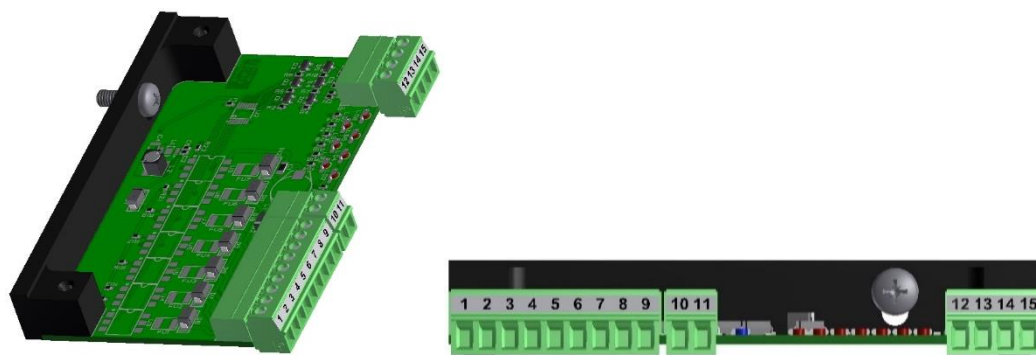

Multiplexing table:

MULTIPLEXING TABLE									
Input 1 (12)	Input 2 (13)	Input 3 (14)	Output 1 (1)	Output 2 (2)	Output 3 (3)	Output 4 (4)	Output 5 (5)	Output 6 (6)	Output 7 (7)
0	0	0	0	0	0	0	0	0	0
24V	0	0	24V	0	0	0	0	0	0
0	24V	0	0	24V	0	0	0	0	0
24V	24V	0	0	0	24V	0	0	0	0
0	0	24V	0	0	0	24V	0	0	0
24V	0	24V	0	0	0	0	24V	0	0
0	24V	24V	0	0	0	0	0	24V	0
24V	24V	24V	0	0	0	0	0	0	24V

ALL RECOMMENDATIONS ARE FOR REFERENCE ONLY

THIS DOCUMENT IS THE PROPERTY OF ALMA. IT CAN BE NEITHER COPIED NOR COMMUNICATED TO ANY THIRD PARTIES WITHOUT ALMA AUTHORIZATION



INSTALLATION GUIDE DI 020 EN B
TURBOTRONIQUE TYPE MTS-xx AND MTP-xx

This document is available at www.alma-alma.fr

Units of measure:
Length: mm
Angle: degree ($^{\circ}$)
Temperature: $^{\circ}\text{C}$

Terminal assignment of the extension board 'sonde AD' 5 wires (IS)

EXTENSION BOARD SONDE AD 5 wires (IS)



NI IN ATEX 510 C

EQUIPMENTS CONNECTED TO THE MICROCOMPT+								EXTENSION BOARD SONDE AD (IS)			
Option	Equipement	Cable (for information)				Function	Colour or No.	Terminal	Function		Observation
		No.	CG*	Alma	Type						
•	OVERFILL PREVENTION PROBE	C7			[6x1]	Common	[Nr]	1	-	OVERFILL PREVENTION PROBES	[If cable are supplied by ALMA]
						Power	[Rg]	2	+		
						From probe	[Or]	3	From probe		
						To probe	[Jn]	4	To probe		

*Refer to the Cable Glands Installation Instructions

ALL RECOMMENDATIONS ARE FOR REFERENCE ONLY

THIS DOCUMENT IS THE PROPERTY OF ALMA. IT CAN BE NEITHER COPIED NOR COMMUNICATED TO ANY THIRD PARTIES WITHOUT ALMA AUTHORIZATION



INSTALLATION GUIDE DI 020 EN B TURBOTRONIQUE TYPE MTS-xx AND MTP-xx

This document is available at www.alma-alma.fr

Units of measure:
Length: mm
Angle: degree (° ' ")
Temperature: °C

Page 20 / 41


Channels that are not connected to overflow prevention probes must be connected to a 'Dummy' device. None of the 8 channels must be open.

**Refer to the Cable Glands Installation Instructions*



This extension board only works with a two-wire optic sensor.

Connection of the non-atex BN1-terminal to the MICROCOMPT+ interface power supply board:

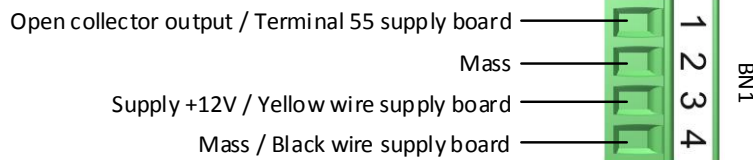

5.5. SPOOL VALVE CONTROL: ELECTRICAL AND HYDRAULIC WIRING

EQUIPMENTS CONNECTED TO THE MICROCOMPT+								INTERFACE POWER SUPPLY BOARD			
Option	Equipement	Cable (for information)				Function	Colour or No.	Terminal	Function		Observation
		No.	CG*	Alma	Type						
	MANIFOLD FLAP CONTROL OR PRODUCT RETURN AUTHORISATION AND/OR ADDITIVATION 2 CONTROL				4 to 7x1	Flap 1	1	39	24VDC = opened flap (outputs FET 24V 5W max.) FET=Field Effect Transistor	EV Flaps or Product return autorisation and/or Additivition 2	Depending on configuration: direct connection or via plexmi electronic board. Refer to the assignment table and to the connection table of the relevant plexmi board
						Flap 2	2	40			
						Flap 3	3	41			
						Flap 4	4	42			
						Flap 5	5	43			
						Flap 6	6	44			
						Flap 7	7	45			
								46			
						1x1	0V		47	0V	
									48		
	RC-HEATING OIL RECEIVER				2x1	Start/Stop	1	49	Start/Stop	RC- Oil_1	
						LF/HF	2	50	LF/HF	RC- Oil_2	
	COUNTED / PUMPED DISTRIBUTION WAY (with additional commands)				3x1	Gravi/Pmp	1	51	0V	Gravity / Pumped	Closed circuit=product pumped (end position)
						Pct/Pnc	2	52	0V	Pumped counted/ no counted	Closed circuit=product counted
						0V	3	59	0V	0V (GND)	51, 52 and 59 are shunted if manual valves are not instrumented
	PTO CONTROL				1x1	PTO Ctrl		58		PTO control	Power- take- off engaged
	FOOTVALVE CONTROL				1x1	Footvalve		64	24VDC= cde	FOOTVALVE	24VDC=opening (Outputs FET 24V 5W max.) FET=Field Effect Transistor
	PRODUCT RETURN CONTROL				3 to 6X1	PR1	1	65	24VDC= author.	Return_1	Depending on configuration: direct connection (Outputs FET Field Effect Transistor 24V 5W max.) or via plexmi electronic board. Refer to the assignment table and to the connection table of the relevant plexmi board
						PR2	2	66		Return_2	
						PR3	3	67		Return_3	
						Chasse		68		Cde chasse	
	ADDITIONAL COMMANDS				5X1	PTO	1	61	24VDC= pto	PTO	(Outputs FET 24V 5W max.) FET=Field Effect Transistor
						Stop Mot.	2	62	24VDC= stop	Stop motor	
						Acc. Mot.	3	73	24VDC= acc.	Motor acceleration	
						Clutching	4	76	24VDC= clutchin	Clutching	
						Start Mot.	5	77	24VDC= start	Start motor	
	ADDITIVATION 1 CONTROL				2x1	Power	1	71	NO free contact	Additivation 1 control	Closed contact=additivation
						Control	2	72			(Output: NO free potential relay)
	SPOOL VALVE CONTROL				2x1	HF		74	HF solenoid valve	Spool valve (hydraulic motor)	
						Author.		75	Author. Solenoid valve		
	MANIFOLD VENT VALVE CONTROL				1x1	Vent valve		78	24VDC	Vent valve control	24VDC=opening (Outputs FET 24V 5W max.) FET=Field Effect Transistor
SOME EXTENSION BOARDS MAY BE SET ON TO THE INTERFACE POWER SUPPLY BOARD											


SOME EXTENSION BOARDS MAY BE SET ON TO THE INTERFACE POWER SUPPLY BOARD

*Refer to the Cable Glands installation instructions

ALL RECOMMENDATIONS ARE FOR REFERENCE ONLY		
THIS DOCUMENT IS THE PROPERTY OF ALMA. IT CAN BE NEITHER COPIED NOR COMMUNICATED TO ANY THIRD PARTIES WITHOUT ALMA AUTHORIZATION		
	INSTALLATION GUIDE DI 020 EN B TURBOTRONIQUE TYPE MTS-xx AND MTP-xx	Units of measure: Length: mm Angle: degree (° ' ") Temperature: °C
	This document is available at www.alma-alma.fr	Page 22 / 41

Terminal assignment of the relay extension board

RELAY EXTENSION BOARD (used to control a minimum 5W spool valve)

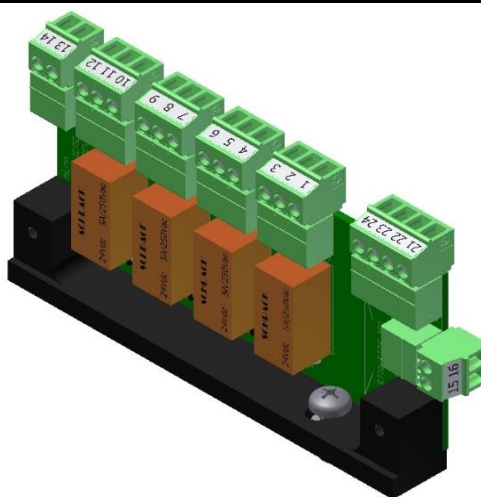

EQUIPEMENT CONNECTED TO THE MICROCOMPT+								RELAY EXTENSION BOARD			
Option	Equipement	Cable (for information)				Function	Colour or No.	Terminal	Function		Observation
		No.	CG*	Alma	Type						
	AUTHORISATION SOLENOID VALVE					Author.		1	NC free contact	RELAY 1	Hydraulic control of hydraulic pump
								2	0V/24VDC		
								3	NO free contact		
	HIGH FLOW SOLENOID VALVE					High flow		4	NC free contact	RELAY 2	High flow control of hydraulic pump
								5	0V/24VDC		
								6	NO free contact		

*Refer to the Cable Glands Installation Instructions

ALL RECOMMENDATIONS ARE FOR REFERENCE ONLY

THIS DOCUMENT IS THE PROPERTY OF ALMA. IT CAN BE NEITHER COPIED NOR COMMUNICATED TO ANY THIRD PARTIES WITHOUT ALMA AUTHORIZATION




INSTALLATION GUIDE DI 020 EN B TURBOTRONIQUE TYPE MTS-xx AND MTP-xx

This document is available at www.alma-alma.fr

Units of measure:
Length: mm
Angle: degree (° ' ")
Temperature: °C

6. ADRIANE TURBINE METER

6.1. ADRIANE TURBINE METER DN50-50 243 100x100

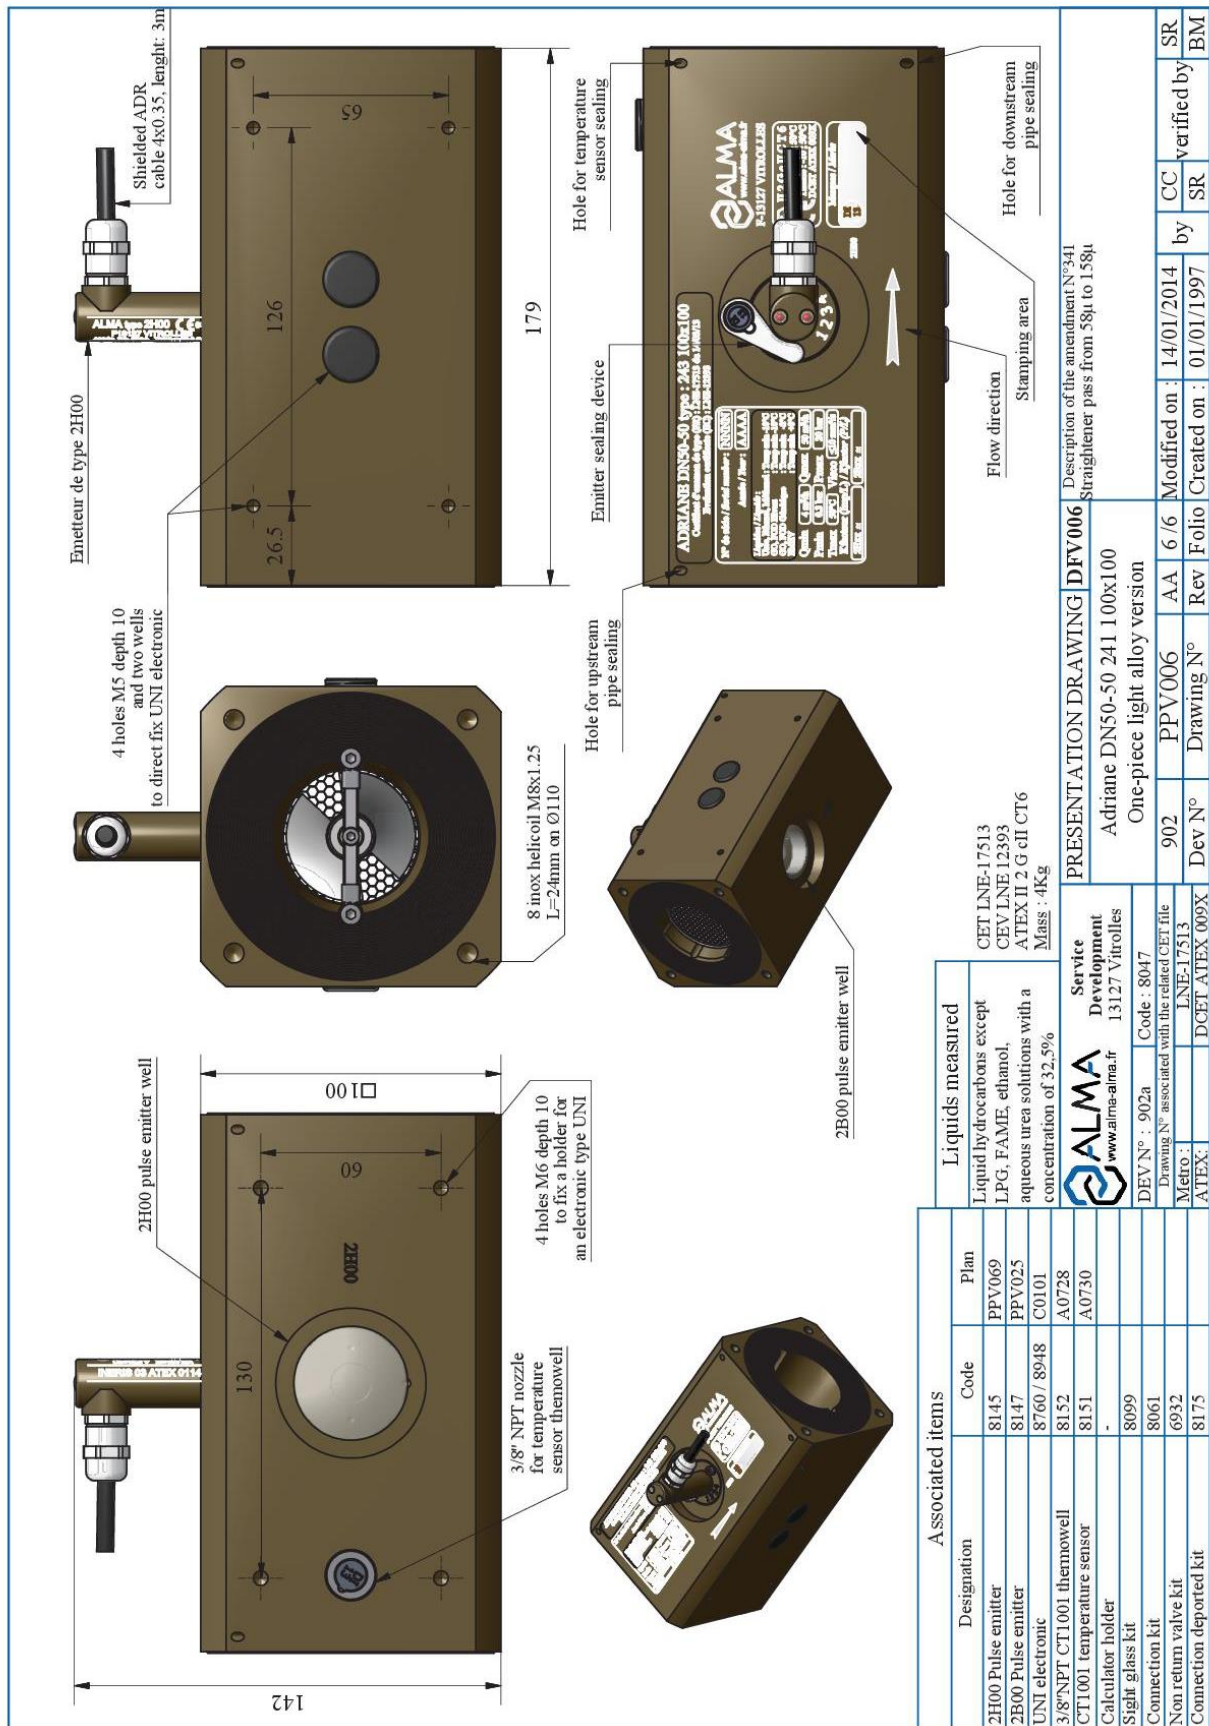

Document available on website alma-alma.fr

ALL RECOMMENDATIONS ARE FOR REFERENCE ONLY

THIS DOCUMENT IS THE PROPERTY OF ALMA. IT CAN BE NEITHER COPIED NOR COMMUNICATED TO ANY THIRD PARTIES WITHOUT ALMA AUTHORIZATION




INSTALLATION GUIDE DI 020 EN B TURBOTRONIQUE TYPE MTS-xx AND MTP-xx

This document is available at www.alma-alma.fr

Units of measure:
Length: mm
Angle: degree (°)
Temperature: °C

6.2. ADRIANE TURBINE METER DN80-80 243 110x110

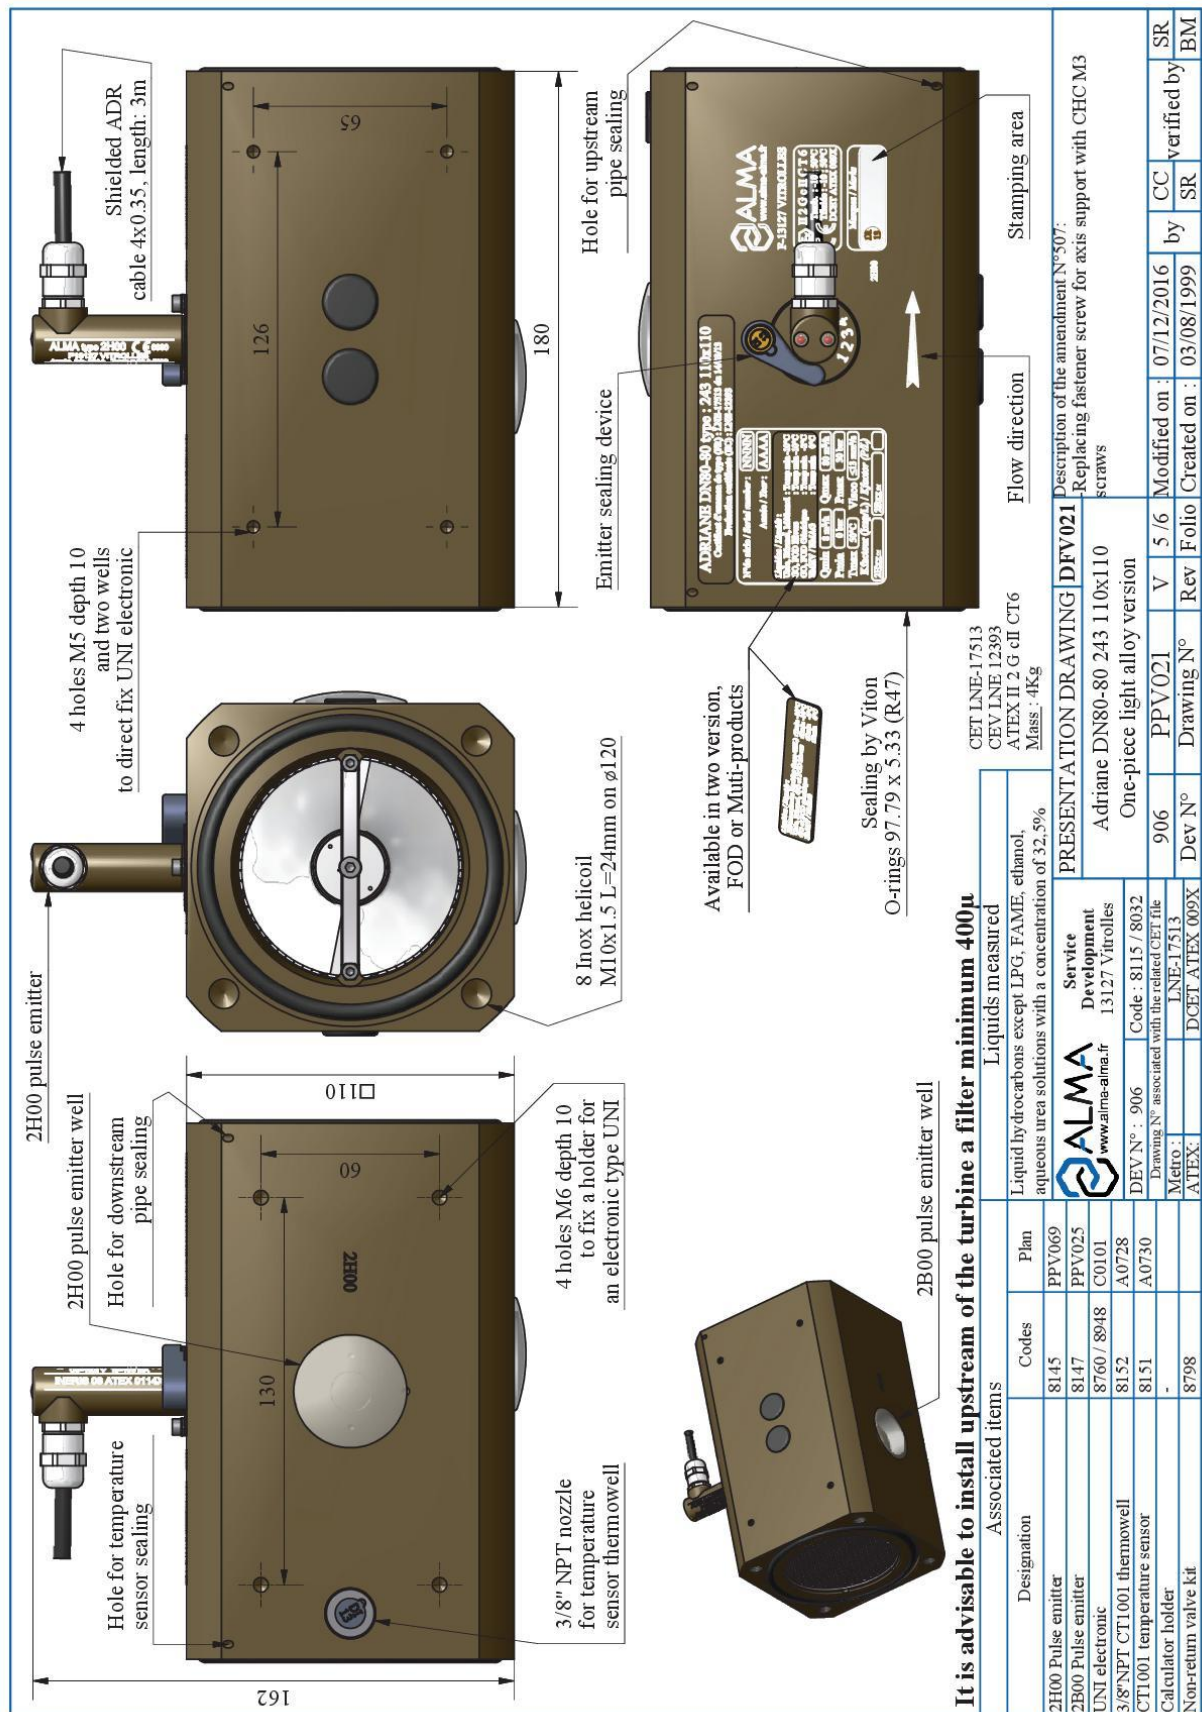

Document available on website alma-alma.fr

6.3. ADRIANE TURBINE METER DN80-80 373 PN16 Adblue®




Document available on website alma-alma.fr

ALL RECOMMENDATIONS ARE FOR REFERENCE ONLY		
THIS DOCUMENT IS THE PROPERTY OF ALMA. IT CAN BE NEITHER COPIED NOR COMMUNICATED TO ANY THIRD PARTIES WITHOUT ALMA AUTHORIZATION		
	INSTALLATION GUIDE DI 020 EN B TURBOTRONIQUE TYPE MTS-xx AND MTP-xx	<u>Units of measure:</u> Length: mm Angle: degree (° / °") Temperature: °C
	This document is available at www.alma-alma.fr	Page 27 / 41

6.4. INSTALLATION AND SEALING RECOMMENDATIONS ADRIANE TURBINE METER

- The identification plate and the led of the pulse emitter(s) shall be visible and accessible.
- The turbine must be installed with respect to the flow direction.
- Put sealing rings each other sides between the turbine and the backflanges.
- Leave an open space all around the turbine in order to ease maintenance.
- Install a 400 μ filter (mini) on the pipe upstream from the turbine meter.
- After installation or during the commissioning period, if the new or modified pipes have not been perfectly cleaned or pickled and passivated, the turbine should be protected by a honeycomb sieve – max. 1mm mesh. It must be placed between two flanges upstream from the turbine.
- Dimensions: A > 100mm.

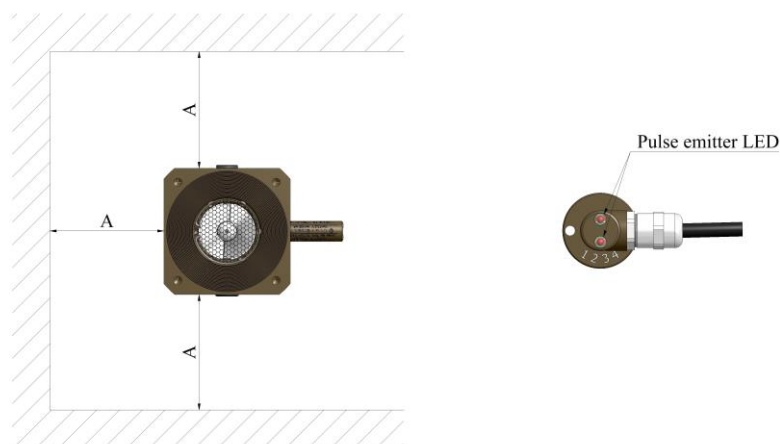

- Refer to the certificate written on the identification plate of the measuring system to suit the sealing requirements
- No loose lead wire on the sealing devices



For accuracy class 0.5 and 1.0 measuring systems, the pipes and equipment upstream or downstream the turbine meter must have the same nominal diameter as the meter on a length at least equal to 10 times this diameter upstream and 5 times this diameter downstream.

These lengths can be straight or bent.

It is mandatory that no flowrate adjustment device (e.g. a variable-opening valve) is located upstream at a distance less than 10 times the nominal diameter of the meter:

Provision contained in EU Type Examination or Evaluation Certificate.

ALL RECOMMENDATIONS ARE FOR REFERENCE ONLY

THIS DOCUMENT IS THE PROPERTY OF ALMA. IT CAN BE NEITHER COPIED NOR COMMUNICATED TO ANY THIRD PARTIES WITHOUT ALMA AUTHORIZATION



INSTALLATION GUIDE DI 020 EN B TURBOTRONIQUE TYPE MTS-xx AND MTP-xx

This document is available at www.alma-alma.fr

Units of measure:
Length: mm
Angle: degree (° ' ")
Temperature: °C

Page 28 / 41

7. PRINTER

Printer kit
with **TM-U295 printer**
Code: 0284 (with 5 meters cable)
Code: 0765 (with 10 meters cable)
(Printer presentation drawing PPN901)

Printer kit
with **SP298MD printer**
Code: 0766 (with 5 meters cable)
Code: 0767 (with 10 meters cable)
(Printer presentation drawing PPN900)

* ADR-RTMD - NFR13-413 cable

PRINTER KIT:
- 1 Printer.
- 1 Printer link cable (Length= 5 or 10m).
- 1 Printer holder (SS 304L thickness 2mm - Mass 1.5 kg).

PRINTER LINK CABLE

TYPE	CABLE	COLOUR WIRE	FUNCTION
Shielded cable * 4x0.75mm ² Ø ext 8 L=5m / Code 4339 L=10m / Code 4578	White (WH) Brown (BN) Yellow (YE) Green (GN) Shielding	24Vdc 0v Tx printer Rx printer Shielding	

PRESENTATION DRAWING PPN902
PRINTER KIT

Service Development
13127 Vitrolles
www.alma-alma.fr

DEV N° : 907 Code : -
Drawing N° associated with the related CEF file
Metro : -



DO NOT EXPOSE THE PRINTER
TO ANY HEAT-SOURCE,
AND PROTECT IT FROM VIBRATIONS
AND FROM WATER PROJECTIONS.

IF IT'S NOT IN THE TRUCK CABIN,
THE PRINTER MUST BE INSTALLED
IN A TIGHT BOX IN ORDER
TO FACILITATE INTRODUCTION AND
EXTRACTION OF PAPER

Document available on website alma-alma.fr

7.1. INSTALLATION RECOMMENDATIONS PRINTER

- The printer must be installed in a tight box and be laid out so as not to obstruct the introduction/extraction of sheet of paper (Dimension D).
- Do not store anything above the printer.
- Leave an open space all around the printer to ease maintenance.
- Dimensions: $A \geq 50\text{mm}$, $B \geq 100\text{mm}$, $C \geq 120\text{mm}$.

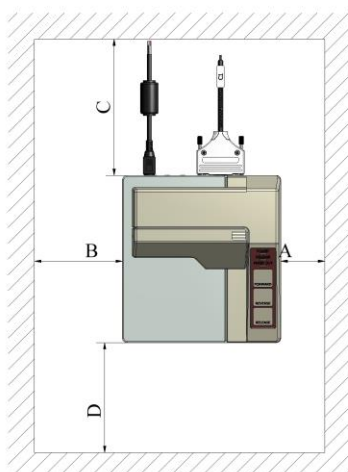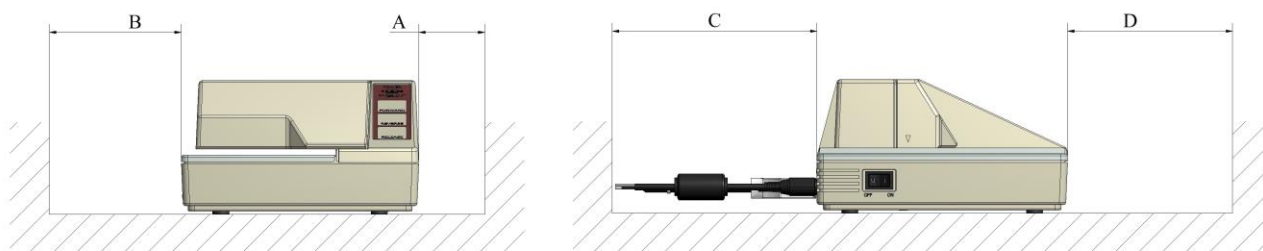

DO NOT EXPOSE THE PRINTER TO ANY HEAT-SOURCE.
PROTECT IT FROM VIBRATIONS AND WATER PROJECTIONS.

ALL RECOMMENDATIONS ARE FOR REFERENCE ONLY

THIS DOCUMENT IS THE PROPERTY OF ALMA. IT CAN BE NEITHER COPIED NOR COMMUNICATED TO ANY THIRD PARTIES WITHOUT ALMA AUTHORIZATION




INSTALLATION GUIDE DI 020 EN B TURBOTRONIQUE TYPE MTS-xx AND MTP-xx

This document is available at www.alma-alma.fr

Units of measure:
Length: mm
Angle: degree (° ' ")
Temperature: °C


Page 30 / 41

8. CONVERTER 24VDC/24VDC 2.1A 50W

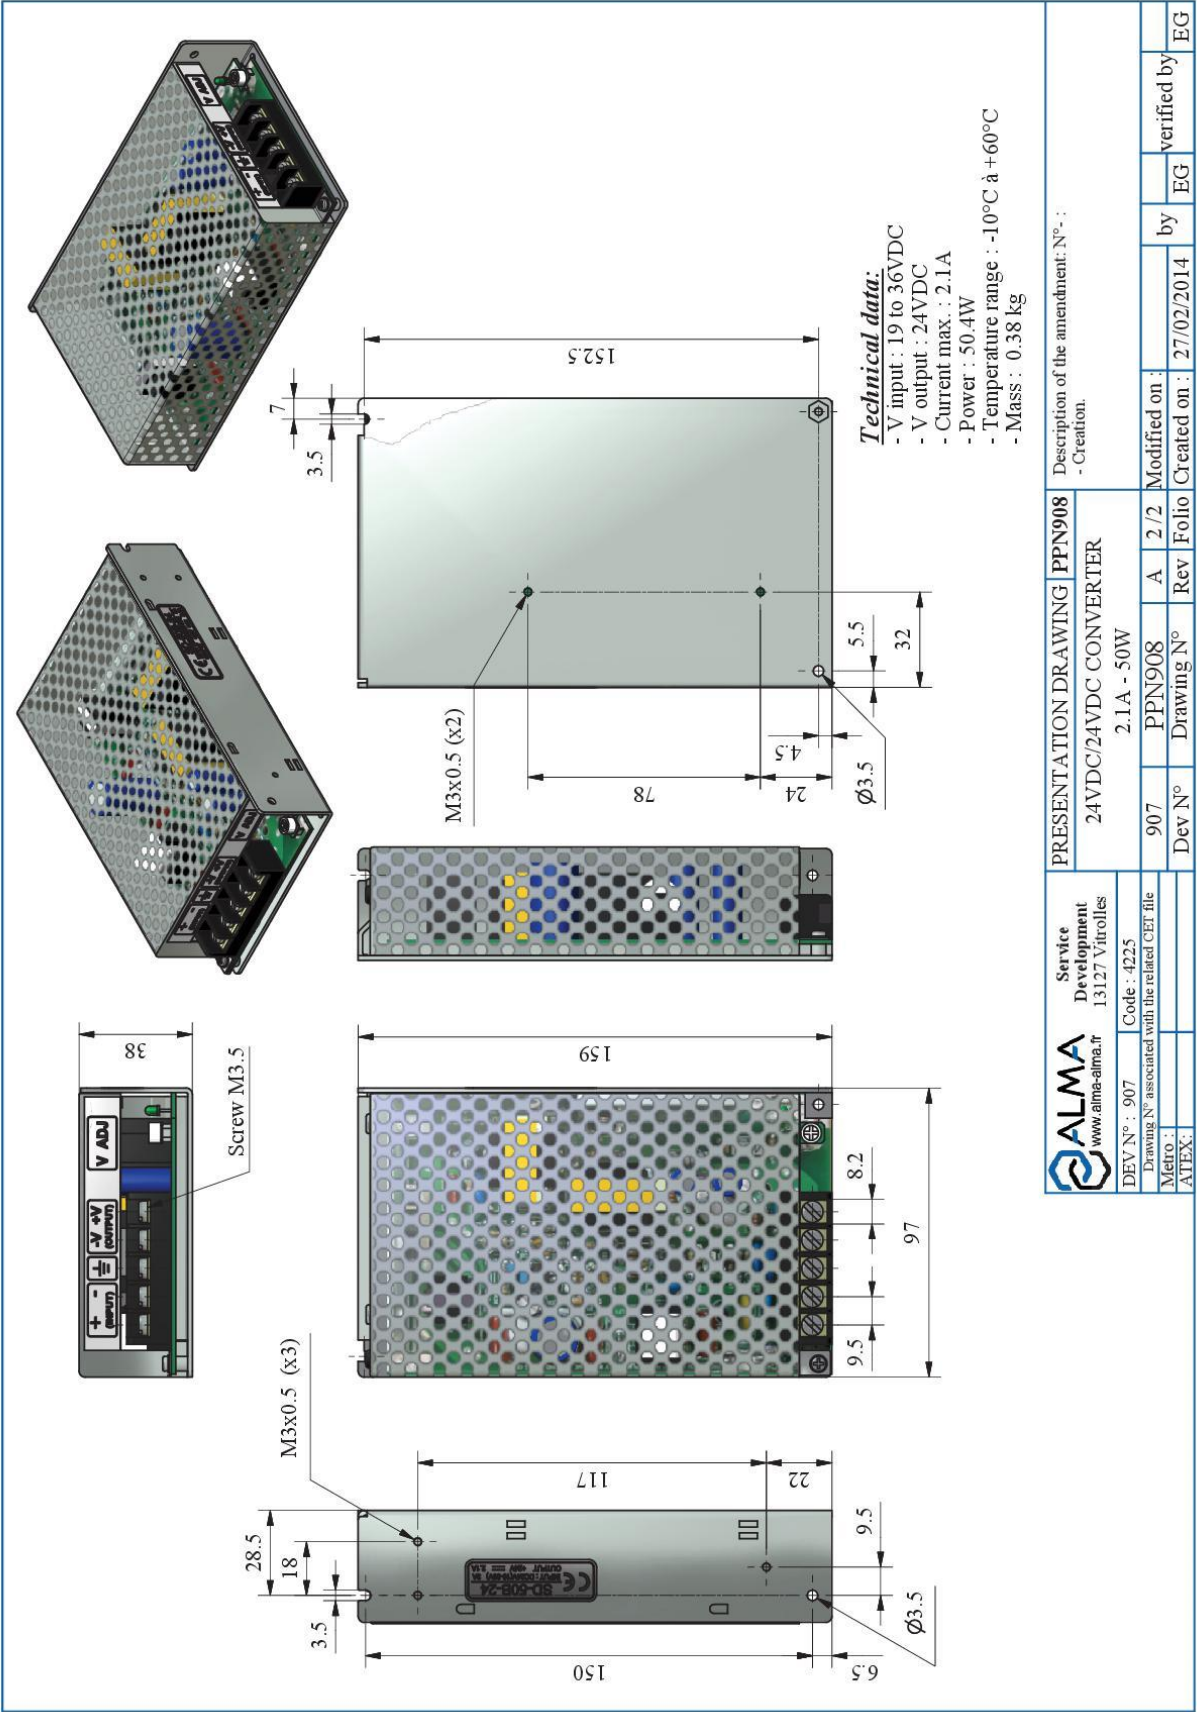

Document available on website [alma-alma.fr](http://www.alma-alma.fr)

9. NON-RETURN VALVE KIT DN50 OR DN80

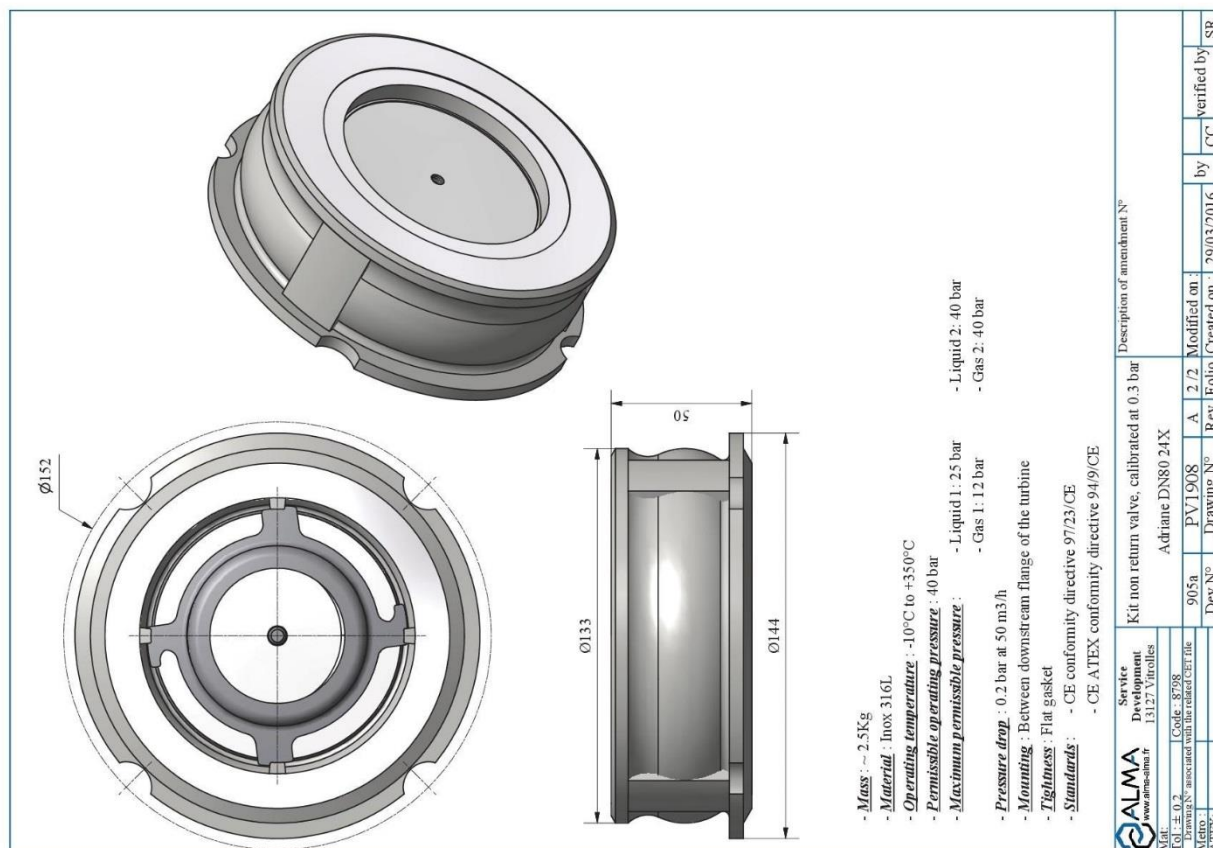Document available on website alma-alma.fr

ALL RECOMMENDATIONS ARE FOR REFERENCE ONLY

THIS DOCUMENT IS THE PROPERTY OF ALMA. IT CAN BE NEITHER COPIED NOR COMMUNICATED TO ANY THIRD PARTIES WITHOUT ALMA AUTHORIZATION




INSTALLATION GUIDE DI 020 EN B
TURBOTRONIQUE TYPE MTS-xx AND MTP-xx

This document is available at www.alma-alma.fr

Units of measure:
Length: mm
Angle: degree ($^{\circ}$ ' ")
Temperature: $^{\circ}\text{C}$

9.1. INSTALLATION RECOMMENDATIONS NON-RETURN VALVE KIT DN50 OR DN80

- Refer to the certificate written on the identification plate of the measuring system to suit the sealing requirements
- No loose lead wire on the sealing devices

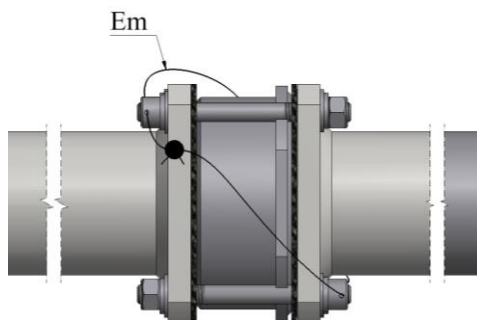

ALL RECOMMENDATIONS ARE FOR REFERENCE ONLY

THIS DOCUMENT IS THE PROPERTY OF ALMA. IT CAN BE NEITHER COPIED NOR COMMUNICATED TO ANY THIRD PARTIES WITHOUT ALMA AUTHORIZATION



INSTALLATION GUIDE DI 020 EN B TURBOTRONIQUE TYPE MTS-xx AND MTP-xx

This document is available at www.alma-alma.fr

Units of measure:
Length: mm
Angle: degree (° ' ")
Temperature: °C

Page 33 / 41

10. SIGHTGLASS KIT DN50 OR DN80

Mounting example

B (1.5 : 1)

Socket head cap screw
For sealing

Rep	Qty	Item description	Material	Reference	Rev.	Mdf	Code	Observation
1	1	Sightglass DN80 110x110	Modified PAMMA	A0533	B		0908	
2	3	CHC screw M10 x 70 (ISO 4762)	Stainless A4-70				8595	
3	1	Washer W M10 (DIN 127)	Stainless A4-70				8474	
4	1	Washer M M10 (NFE 25-514)	Stainless A4-70				8430	
5	1	CHC screw M10 x 70 (ISO 4762) with head pierced	Stainless A4-70	PN0030	B	A	3465	

Put parts in a bag

Service Development
13127 Vitrolles
www.alma-alma.fr

ALMA

Mod: 13127 Vitrolles
Tol: ± 0.2
Code: 8099
Drawing N° associated with the related CEF file
Metro: ATEX

Adriane turbine meter DN80 24X

905 PV167.4 B 2/2 Modified on: 17/02/2017 by CC verified by SR

Dev N° Drawing N° Rev Folio Created on: 30/03/2016 CC CC

Mounting example

B (1.5 : 1)

Socket head cap screw
For sealing

Rep	Qty	Item description	Material	Reference	Rev.	Mdf	Code	Observation
1	1	Sightglass DN50	Modified PAMMA	A0389	C		8062	
2	1	Plast gasket DN50 100x100	Klingersil C-H30	A0386	B		8251	
3	4	Washer M M8 (NFE 25-514)	Stainless A4-70				8245	
4	4	Washer W M8 (DIN 127)	Stainless A4-70				8244	
5	3	CHC screw M8 x 80 (ISO 4762)	Stainless A4-70				8247	
6	1	CHC screw M8 x 80 (ISO 4762) with head pierced	Stainless A4-70	PN0030	B	A	2178	

Put parts in a bag

Service Development
13127 Vitrolles
www.alma-alma.fr

ALMA

Mod: 13127 Vitrolles
Tol: ± 0.2
Code: 8099
Drawing N° associated with the related CEF file
Metro: ATEX

Adriane DN50 24X

902 PV1669 B 2/2 Modified on: 17/02/2017 by CC verified by SR

Dev N° Drawing N° Rev Folio Created on: 30/03/2016 CC CC

Document available on website alma-alma.fr

10.1. INSTALLATION RECOMMENDATIONS SIGHTGLASS KIT DN50 OR DN80

- Refer to the certificate written on the identification plate of the measuring system to suit the sealing requirements
- No loose lead wire on the sealing devices



ALL RECOMMENDATIONS ARE FOR REFERENCE ONLY

THIS DOCUMENT IS THE PROPERTY OF ALMA. IT CAN BE NEITHER COPIED NOR COMMUNICATED TO ANY THIRD PARTIES WITHOUT ALMA AUTHORIZATION





INSTALLATION GUIDE DI 020 EN B TURBOTRONIQUE TYPE MTS-xx AND MTP-xx

This document is available at www.alma-alma.fr

Units of measure:
Length: mm
Angle: degree (° ' ")
Temperature: °C

11. CONNECTION KIT 100x100 DN50 OR DN80

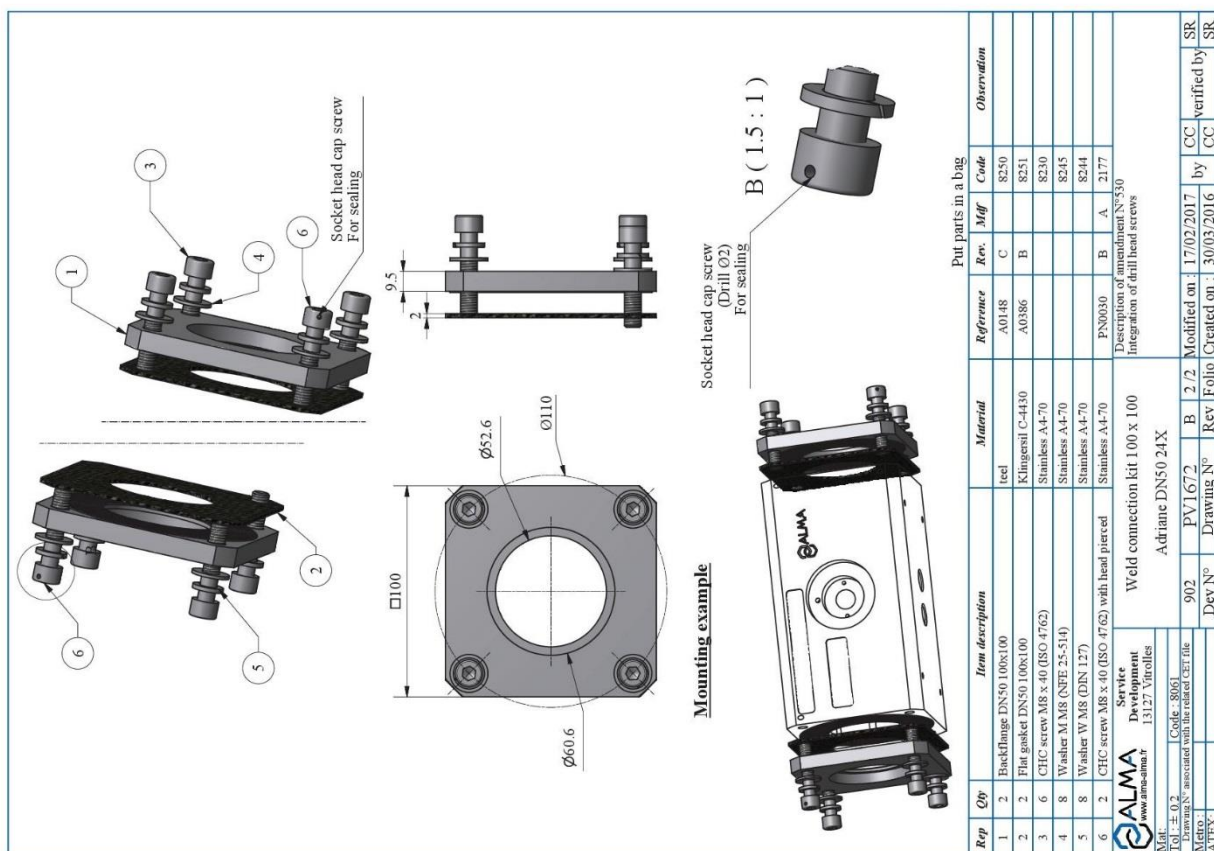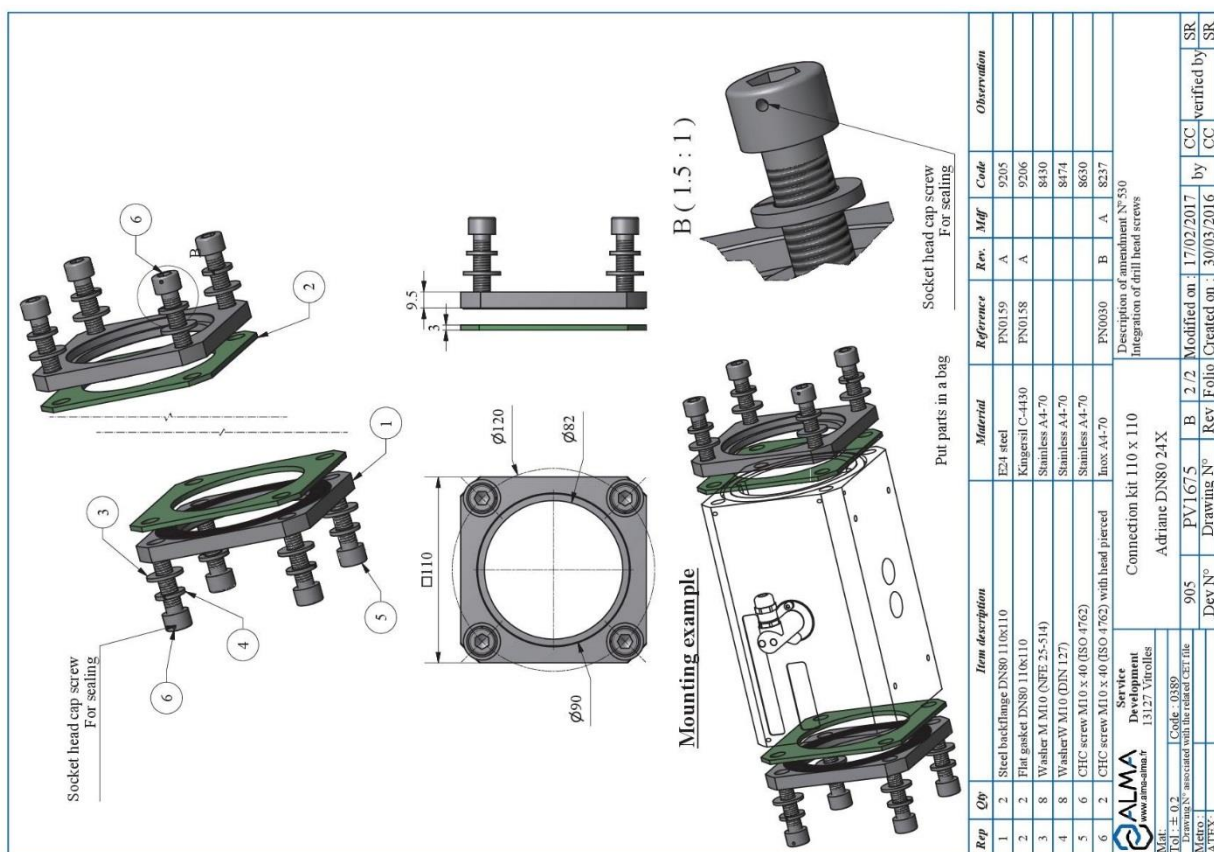

Document available on website alma-alma.fr

ALL RECOMMENDATIONS ARE FOR REFERENCE ONLY

THIS DOCUMENT IS THE PROPERTY OF ALMA. IT CAN BE NEITHER COPIED NOR COMMUNICATED TO ANY THIRD PARTIES WITHOUT ALMA AUTHORIZATION



INSTALLATION GUIDE DI 020 EN B

TURBOTRONIQUE TYPE MTS-xx AND MTP-xx

This document is available at www.alma-alma.fr

Units of measure:
Length: mm
Angle: degree (° ' ")
Temperature: °C

12. NC/NO SOLENOID VALVES KIT NON ATEX OR ATEX

12.1. NC/NO SOLENOID VALVES KIT NON ATEX

CONNECTOR SUPPLIED UNASSEMBLED

Connector and seal

Terminal block

TERMINALS

Terminal 1 (+)
Terminal 2 (-)
Earth terminal

Pneumatic diagram

2/2NC - 2/2NO

Air supply

Air output

24

30

18

75.5

15

18

15

M3x0.5 (x4)

48

39

62

30

93.5

20.5

Without connector

The coils can be oriented on 360°

EV NF

EV NO

1

2

Technical data:

- Tamb. max. : -10°C to +60°C
- Protection class : IP65
- Operating voltage : 24Vdc - Power : 5W
- Pressure : 0 - 10 bar max.
- Body : Brass G1/8 - Orifice : DN1.2 - Seal : FKM
- Pneumatic fitting : G1/8 for pipe 6/4
- Plug-in connector : Cable : Ø 6-7mm
- Installation : the kit can be mounted in any position
- Mass : 0.3 kg

PRESENTATION DRAWING DFN032

NC/NO - NON A TEX

SOLENOID VALVES KIT

907

PPN032

Drawing N°

Rev

5/5

Folio

Modified on : 05/05/2014

Created on : 10/06/2009

by DSDS

EG verified by DSDM

Description of the amendment: N° :
- English version of presentation drawing.

ALMA
Service Development
www.alma-alma.fr
13127 Vitrolles

DEV N° : 907

Code : 4146

Drawing N° associated with the related CIEI file

Metro : -

APPV : -

Document available on website alma-alma.fr

ALL RECOMMENDATIONS ARE FOR REFERENCE ONLY		
THIS DOCUMENT IS THE PROPERTY OF ALMA. IT CAN BE NEITHER COPIED NOR COMMUNICATED TO ANY THIRD PARTIES WITHOUT ALMA AUTHORIZATION		
	INSTALLATION GUIDE DI 020 EN B TURBOTRONIQUE TYPE MTS-xx AND MTP-xx	<u>Units of measure:</u> Length: mm Angle: degree (° / °") Temperature: °C
	This document is available at www.alma-alma.fr	Page 37 / 41

12.2. NC/NO SOLENOID VALVES KIT ATEX

Technical data:

- Ex protection : II 2G-Exmb IIC T4 Gb
- Tamb. max. : -10°C to +55°C
- Protection class : IP65
- Operating voltage : 24VDC ±10% - Power : 3W
- Pressure : 0 - 10 bar max. - Flow rate: 55 l/min (air).
- Body valve : brass G1/8 - Orifice : DN1.2 - Seal : FKM
- Pneumatic fitting : G1/8 and R1/8 for pipe 6/4
- Cable : moulded 3G0.75 L=3m
- Installation : free
- Mass : 1 kg

Pneumatic diagram


Solenoid valve 3/2NC configured 2/2NC

Solenoid valve 3/2NC configured 2/2NO

ALMA Service Development 13127 Vitrolles www.alma-alma.fr		PRESENTATION DRAWING PPN903		Description of the amendment: N°454 : Mise à jour	
DEV N° : 907	Code : 4591	C	2 / 2	Modified on : 07/01/2016	by EG
Drawing N° associated with the related CER file	-	PPN903	Rev	Folio	Created on : 29/04/2009
Metro : -	-	907	Dev N°	Drawing N°	SR
ATEX: -	-	-	-	-	FDS

Document available on website [alma-alma.fr](http://www.alma-alma.fr)

13. TEMPERATURE PROBE Pt100 – CT1001 ATEX

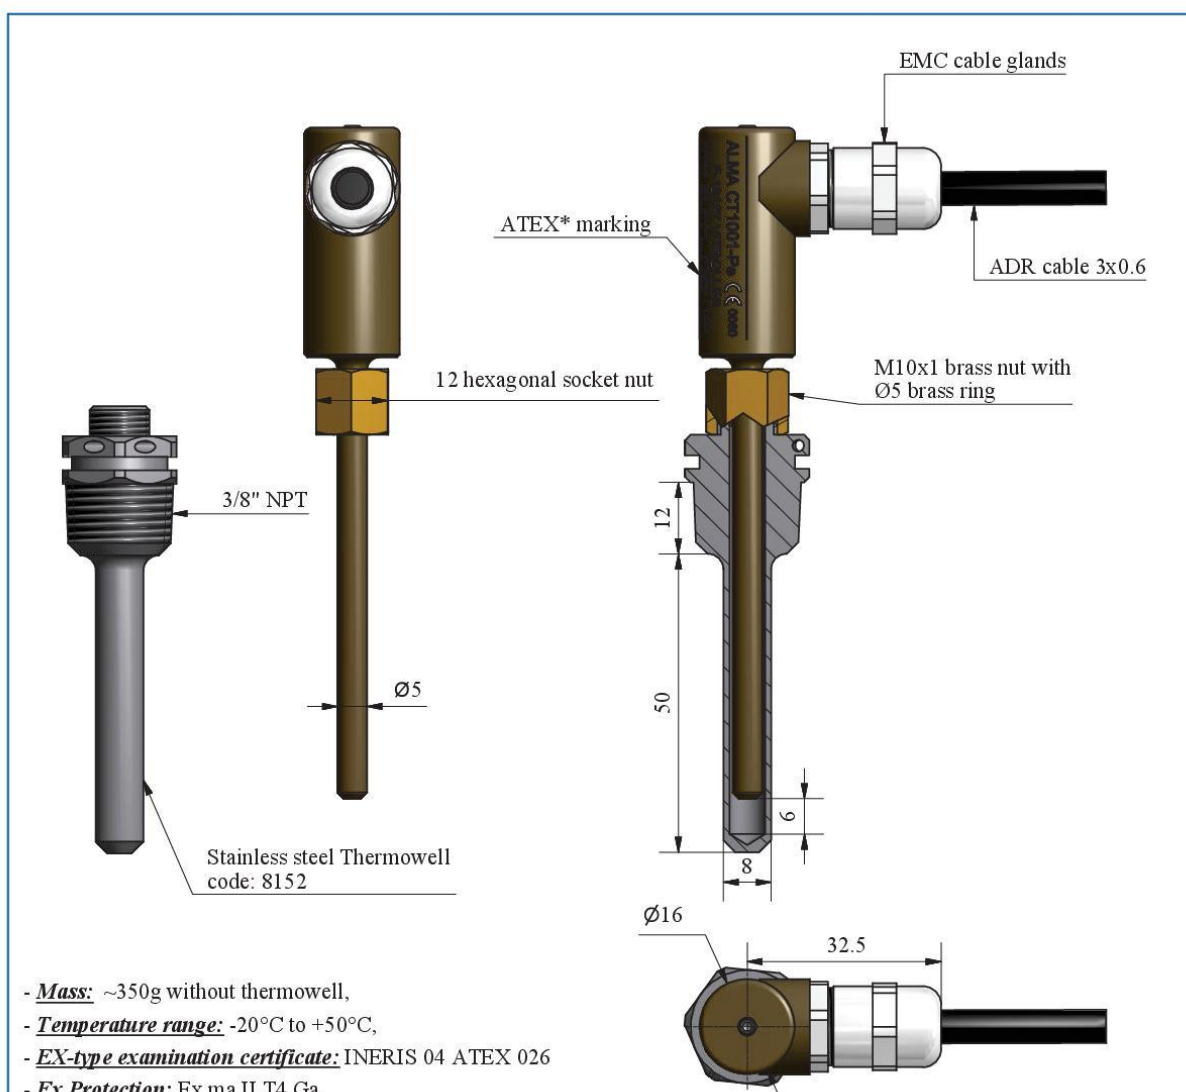

- **Mass:** ~350g without thermowell,
- **Temperature range:** -20°C to +50°C,
- **EX-type examination certificate:** INERIS 04 ATEX 026
- **Ex Protection:** Ex ma II T4 Ga

The sensor body is made of bronze color anodized aluminum alloy; The ring and the nut are made of brass. The probe can be mounted either on a ALMA thermowell or on a thimble connection 1/4 "BSP (M10x1 n5). Before installation, lubricate the parts in contact with the thermowell or the boss, to prevent corrosion

PT100 features:

- 3 wires
- 1/3 DIN

*ATEX "ma" certification.
For installation and use in hazardous areas see Instruction manual

Also available with output connector according to IEC 60947-5-2


Connecting the cable		
<i>Function</i>	<i>Marking on the wire</i>	<i>Color wire</i>
PT100/1	1	Yellow
PT100/2	2	White
PT100/3	3	Green

 ALMA www.alma-alma.fr	Service Development 13127 Vitrolles		PRESENTATION DRAWING DFV042				Description of the amendment MDV596 Compliance with ATEX marking			
	DEV N° : 949d Code : 8151		Temperature probe CT1001-Pe							
	Drawing N° associated with the related CEF file									
Metro : ATEX :	INERIS 04 ATEX 0026		949d	PPV042	K	5 / 7	Modified on : 12/01/2018	by ROC RM	verified by	CC R
			Dev N°	Drawing N°	Rev	Folio	Created on : 13/09/2003			

Document available on website alma-alma.fr

ALL RECOMMENDATIONS ARE FOR REFERENCE ONLY		
THIS DOCUMENT IS THE PROPERTY OF ALMA. IT CAN BE NEITHER COPIED NOR COMMUNICATED TO ANY THIRD PARTIES WITHOUT ALMA AUTHORIZATION		
	INSTALLATION GUIDE DI 020 EN B TURBOTRONIQUE TYPE MTS-xx AND MTP-xx	<u>Units of measure:</u> Length: mm Angle: degree (° / °") Temperature: °C
	This document is available at www.alma-alma.fr	Page 39 / 41

13.1. INSTALLATION RECOMMENDATIONS TEMPERATURE PROBE

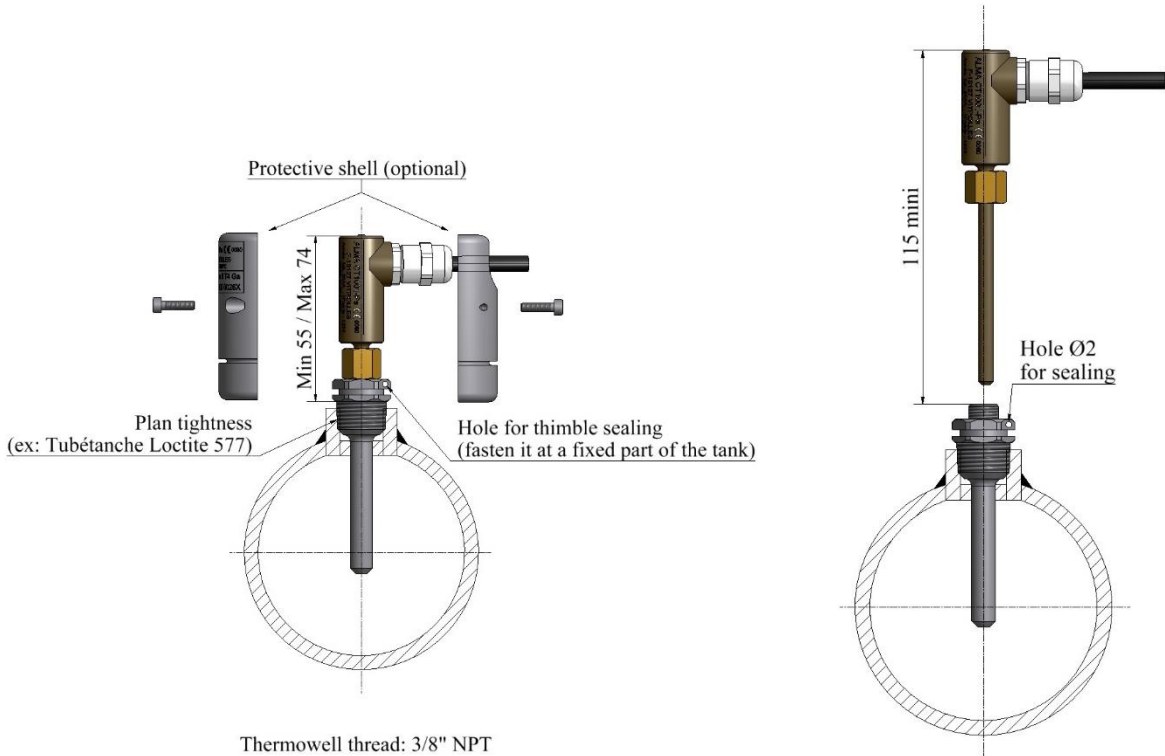

REFER TO INSTRUCTION MANUAL
(DELIVERED WITH THE EQUIPMENT AND AVAILABLE ON ALMA WEBSITE)


INSTALLATION OF THE TEMPERATURE SENSOR
ON THE ALMA TURBINE METER:



ALL RECOMMENDATIONS ARE FOR REFERENCE ONLY		
THIS DOCUMENT IS THE PROPERTY OF ALMA. IT CAN BE NEITHER COPIED NOR COMMUNICATED TO ANY THIRD PARTIES WITHOUT ALMA AUTHORIZATION		
	INSTALLATION GUIDE DI 020 EN B TURBOTRONIQUE TYPE MTS-xx AND MTP-xx	Units of measure: Length: mm Angle: degree (° ' ") Temperature: °C
	This document is available at www.alma-alma.fr	Page 40 / 41

14. KIT FOR MEASURING SYSTEM IDENTIFICATION PLATE

The identification plate shall be clearly installed, near the associated indicator device, and of easy access in order to be able to read features and to stamp the regulatory marks.

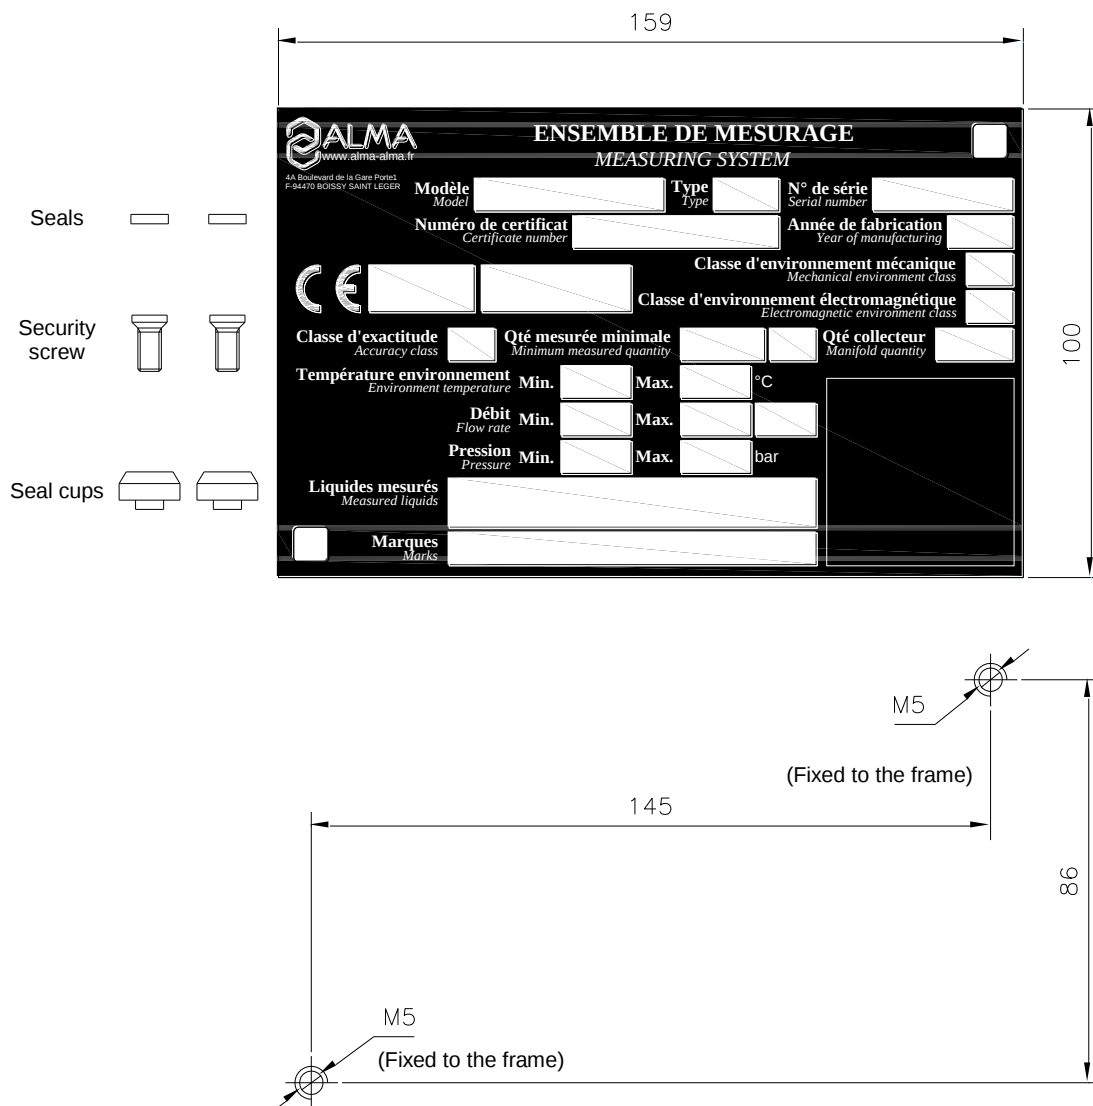

The security screws of the cups (provided by ALMA) must be screwed in the tap of the frame (do not use removable nuts).

ALL RECOMMENDATIONS ARE FOR REFERENCE ONLY

THIS DOCUMENT IS THE PROPERTY OF ALMA. IT CAN BE NEITHER COPIED NOR COMMUNICATED TO ANY THIRD PARTIES WITHOUT ALMA AUTHORIZATION



INSTALLATION GUIDE DI 020 EN B
TURBOTRONIQUE TYPE MTS-xx AND MTP-xx

This document is available at www.alma-alma.fr

Units of measure:
Length: mm
Angle: degree (° ' ")
Temperature: °C

Page 41 / 41