


INSTALLATION GUIDE

DI 026 EN B
CRYOTRONIQUE CO2

Described in EU-type examination certificate N°: LNE-34322




B	2021/02/23	Optional PT3, configurable PV3 terminology Update of drawings	DSM	FDS
A	2020/01/21	Creation [PJV162]	DSM	MV
Issue	Date	Nature of modifications	Written by	Approved by

TOUTES LES PRECONISATIONS NE SONT DONNEES QU'A TITRE INDICATIF				
CE DOCUMENT EST LA PROPRIETE DE LA SOCIETE ALMA. IL NE PEUT ETRE NI COPIE NI COMMUNIQUE A DES TIERS SANS AUTORISATION D'ALMA				
	DOSSIER D'INSTALLATION DI 026 FR B CRYOTRONIQUE CO2			Unités de Mesures : Longueur : mm Angle : degré (° ' ") Température : °C
	Ce document est disponible sur www.alma-alma.fr			Page 1 / 23

CONTENTS

1. GENERAL RECOMMENDATIONS	3
1.1. MECHANICAL RECOMMENDATIONS	3
1.2. ELECTRICAL RECOMMENDATIONS	4
1.3. PNEUMATIC RECOMMENDATIONS	6
2. GENERAL PRESENTATION.....	7
2.1. USE ACCORDING TO MID CERTIFICATE	7
2.2. SPECIAL CONDITIONS FOR INSTALLATION	7
3. PART LIST	8
4. MICROCOMPT+.....	9
4.1. INSTALLATION RECOMMENDATIONS CALCULATOR-INDICATOR MICROCOMPT+	10
4.2. ELECTRICAL WIRING CALCULATOR-INDICATOR MICROCOMPT+.....	11
Terminal assignment of the power supply board.....	12
Connection of the network board – Ethernet, RS232/485, CANBus	15
4.3. GSM/GPS MODULE EQUIPPED – 2-ANTENNA BOX.....	16
Mounting and wiring of the GSM and GPS antennas.....	17
Mounting of the GSM/GPS cables into the cable glands.....	18
Wiring of the 2-antenna box to the MICROCOMPT+	18
5. ADRIANE TURBINE METER DN50-50 CO2 PN40.....	19
5.1. INSTALLATION AND SEALING RECOMMENDATIONS ADRIANE TURBINE METER.....	20
6. TEMPERATURE PROBE PT100 – CT1001 ATEX	21
6.1. INSTALLATION RECOMMENDATIONS TEMPERATURE PROBE.....	22
7. KIT FOR MEASURING SYSTEM IDENTIFICATION PLATE	23


ALL RECOMMENDATIONS ARE FOR REFERENCE ONLY		
THIS DOCUMENT IS THE PROPERTY OF ALMA. IT CAN BE NEITHER COPIED NOR COMMUNICATED TO ANY THIRD PARTIES WITHOUT ALMA AUTHORIZATION		
	INSTALLATION GUIDE DI 026 ENB CRYOTRONIQUE CO2	Units of measure: Length: mm Angle: degree (° ' ") Temperature: °C
	This document is available at www.alma-alma.fr	Page 2 / 23


1. GENERAL RECOMMENDATIONS

IN ORDER TO AVOID ALL THE PROBLEMS CONCERNING THE INSTALLATION, THE OPERATION AND THE MAINTENANCE OF THE EQUIPMENTS, BEING ABLE TO CREATE INOPPORTUNE FAILURE, PLEASE RESPECT THE FOLLOWING RECOMMENDATIONS.

BEFORE ANY WORK, MAKE SURE THAT THE EQUIPMENTS ARE NOT POWERED.


1.1. MECANICAL RECOMMENDATIONS


- ⇒ Respect the recommendations of the instruction manual specifying the installation, operation and maintenance conditions of the ATEX equipment (instruction manual supplied with the equipment).
- ⇒ Take care to place the equipment in order to facilitate their installation, operation and maintenance by the technicians (working ergonomics).
- ⇒ Take care to position properly the equipment; the display must be readable without any difficulty.
- ⇒ Apply a tightening torque suitable with size and material of the fixation element except particular specifications mentioned on the presentation drawing or in the installation guides.
- ⇒ Mechanically protect the cables with the corrugated conduit if the cables are not ADR (corrugated conduit adapted to vehicles used for "carriage of dangerous goods of road" - hydrocarbons, LPG ... - and meet the requirements of French standard NF R13-903. Refer to the regulations in force).
- ⇒ Ensure there are a good mechanical strength and a good sealing between cable glands and cables, and between cable glands and corrugated conduit.
- ⇒ Respect cables and corrugated conduit radii of curvature.
- ⇒ Leave enough flexibility to wires in order to avoid any risk of stripping.
- ⇒ Allow the drainage of the water in the lower loop (siphon) of the corrugated conduit (not water retention inside the corrugated conduit).
- ⇒  See § INSTALLATION AND SEALING RECOMMENDATIONS ADRIANE TURBINE METER.

ALL RECOMMENDATIONS ARE FOR REFERENCE ONLY		
THIS DOCUMENT IS THE PROPERTY OF ALMA. IT CAN BE NEITHER COPIED NOR COMMUNICATED TO ANY THIRD PARTIES WITHOUT ALMA AUTHORIZATION		
	INSTALLATION GUIDE DI 026 ENB CRYOTRONIQUE CO2	Units of measure: Length: mm Angle: degree (° ' ") Temperature: °C
	This document is available at www.alma-alma.fr	Page 3 / 23

1.2. ELECTRICAL RECOMMENDATIONS

- ⇒ According to the ATEX directive or any other regulations in force in the country of destination, the safety protection level of the equipment must agree with the installation area (potentially explosive atmospheres).
- ⇒ Respect the recommendations of the instruction manual specifying the installation, operation and maintenance conditions of the ATEX equipment (instruction manual supplied with the equipment).
- ⇒ Connect the supply of the equipment downstream cut-out, on the power supply reserved to the measured distribution.
- ⇒ Put a delayed protection of 5A upstream the 24VDC supply to protect equipment in case of reverse polarity or overcurrent.
- ⇒ Use ADR specific cable, if it is not the case, use at minimum a cable resisting to hydrocarbons. Mechanically protect this cable with a corrugated conduit (corrugated conduit adapted to vehicles used for "carriage of dangerous goods by road" - hydrocarbons, LPG ... - and meet the requirements of French standard NF R13-903. Refer to the regulations in force).
- ⇒ Take care not to damage the terminals of the different electronic boards while wiring.
 - Screw terminals: do not damage the screw heads of the terminals.
 - Use insulated lugs and insulated wire ferrules adapted to the section of wires.
 - Spring terminals: do not block the springs (if a spring is blocked, the electronic board must be replaced).
 - Use flat screwdriver 0.4x2.5 (see fig.1).
 - Insert the screwdriver slightly tilted, then push it perpendicularly to the terminal.
 - Do not exceed the upright position when the screwdriver is down in order not to block the spring.
 - Insert or remove the wire and remove the screwdriver.
- ⇒ Pass the power supply cores (24VDC truck) through the ferrites by carrying out a loop (ALMA supply).
- ⇒ Do not use wires of section higher than 1.5mm².
- ⇒ Do not insert more than two wires in a terminal, if necessary use an insulated twin wire ferrule (unless otherwise indicated).
- ⇒ Strictly respect the polarities of the input/output when wiring, in accordance with serigraphy on the cards and/or with the installation guide indications.
- ⇒ Whenever possible, perform a wired test, after wiring and before powering.
- ⇒ Whenever possible, respect the locations of the cables specified in the installation guide.
- ⇒ Equipment must be connected to the frame ground (external ground connection).
- ⇒ Whenever possible, use shielded cables with a 360° connection through the metal cable glands (see the documentation delivered with the equipment).
Otherwise, connect the shields to devices inside the equipment (ground terminal, earth bar, earth boss...).



ALL RECOMMENDATIONS ARE FOR REFERENCE ONLY		
THIS DOCUMENT IS THE PROPERTY OF ALMA. IT CAN BE NEITHER COPIED NOR COMMUNICATED TO ANY THIRD PARTIES WITHOUT ALMA AUTHORIZATION		
	INSTALLATION GUIDE DI 026 ENB CRYOTRONIQUE CO2	Units of measure: Length: mm Angle: degree (° ' ") Temperature: °C
	This document is available at www.alma-alma.fr	Page 4 / 23

- ⇒ Whenever possible, label the cables and cores according to the installation guide to facilitate the later maintenance operations.
- ⇒ Respect a homogeneous wire color code.
- ⇒ Printer TMU295: before positioning the printer on its support, check that configuration switches of the data link protocol, located under the printer, are well positioned: No3 on 'ON' and the 7 others on 'OFF'.
- ⇒ Current of the electrical devices:

Electrical devices	Supply voltage	Minimum current	Maximum current
MICROCOMPT+	24VDC +/-10%	0.7 A	1.5 A
PRINTER	24VDC +/-10%	0.1 A	5.5 A (switch-on)

- ⇒ Color code according to DIN 47100.
- ⇒ Code for designation of colours according to IEC 60757 (except FR codes):

FR				EN	IT	ES	DE
Couleurs	Codes		Standard codes CEI 60757	Colours	Colori	Colores	Farbe
Blanc	Bc		WH	White	Bianco	Blanco	Weiß
Marron	Mr		BN	Brown	Marrone	Marrón	Braun
Vert	Vt		GN	Green	Verde	Verde	Grün
Jaune	Jn		YE	Yellow	Giallo	Amarillo	Gelb
Gris	Gr		GY	Grey	Grigio	Gris	Grau
Rose	Rs		PK	Pink	Rosa	Rosa	Lila
Bleu	Bl		BU	Blue	Blu	Azul	Blau
Rouge	Rg		RD	Red	Rosso	Rojo	Rot
Noir	Nr		BK	Black	Nero	Negro	Schwarz
Violet	Vi		VL	Violet	Viola	Violeta	Violett
Orange	Or		OG	Orange	Arancio	Naranja	Orange
Vert/Jaune	V/J		GYE	Green/Yellow	Verde/Giallo	Verde/Amarillo	Grün/Gelb

ALL RECOMMENDATIONS ARE FOR REFERENCE ONLY

THIS DOCUMENT IS THE PROPERTY OF ALMA. IT CAN BE NEITHER COPIED NOR COMMUNICATED TO ANY THIRD PARTIES WITHOUT ALMA AUTHORIZATION



INSTALLATION GUIDE DI 026 ENB CRYOTRONIQUE CO2

This document is available at www.alma-alma.fr

Units of measure:
Length: mm
Angle: degree (° ' ")
Temperature: °C

Page 5 / 23


1.3. PNEUMATIC RECOMMENDATIONS

- ⇒ Air must be filtered – from 40 to 20µm. Specific recommendations may be added in the installation guides or on the presentation drawings.
- ⇒ The air lubrication must be permanent and correct to avoid any damage on the pneumatic components.
- ⇒ The air supply pressure to the inlet of the equipment must be at least 6 bar and max 8 bar. Specific recommendations may be added in the installation guides or on the presentation drawings.
- ⇒ The pneumatic supply pipes (6/4) must be cut straight (no slanting cut) and should not be crushed after cutting to prevent leakage on fittings.
- ⇒ Respect the radii of curvature of the pneumatic pipes indicated by the manufacturer.
- ⇒ Use colored pneumatic pipes to ease maintenance operation.
- ⇒ In no case the exhaust holes of the pneumatic organs should be plugged, obstructed, unless if that is clearly specified in the installation guides or on presentation drawings.
- ⇒ The use of muffler is not allowed under any circumstances (fouling, frost...). Put a pneumatic pipe of sufficient length, pointed downwards, so that its end is placed in a protected area (L = 100 mm min.).
- ⇒ Pressure unit conversion:

PRESSURE UNIT CONVERSION				
Unités	Bar	PSI	Pascal	kg/cm ²
1 Bar =	1	14,5	100 000 (1x10 ⁵)	1,0197
1 PSI =	0.069	1	6894,5	0,07031
1 Pascal =	1x10 ⁻⁵	14,5x10 ⁻⁵	1	1,0197x10 ⁻⁵
1 kg/cm ² =	0,98	14,22	98066,5	1

PSI = Pound per Square Inch (livre par pouce carré)

1 bar = 100 kPa = 0.1 MPa (1 MPa = 10 bar)

ALL RECOMMENDATIONS ARE FOR REFERENCE ONLY		
THIS DOCUMENT IS THE PROPERTY OF ALMA. IT CAN BE NEITHER COPIED NOR COMMUNICATED TO ANY THIRD PARTIES WITHOUT ALMA AUTHORIZATION		
	INSTALLATION GUIDE DI 026 ENB CRYOTRONIQUE CO2	Units of measure: Length: mm Angle: degree (° ' ") Temperature: °C
	This document is available at www.alma-alma.fr	Page 6 / 23

2. GENERAL PRESENTATION

2.1. USE ACCORDING TO MID CERTIFICATE

The measuring system CRYOTRONIQUE is covered by the EU type examination certificate N° LNE-34322. Refer to this certificate for any precision about its installation.

For the sealing plan, see Annex to EU type examination certificate N° LNE-34322.

2.2. SPECIAL CONDITIONS FOR INSTALLATION

- ⇒ Piping and equipment located upstream or downstream of the ADRIANE DN50-50 CO₂ turbine meter must have a nominal diameter identical to that of the turbine on a length at least equal to 10 times the nominal diameter upstream and at least equal to 5 times the nominal diameter downstream.

No regulating device (variable opening valve, check valve...) must be located on the piping upstream of the turbine for a length at least equal to 10 times its nominal diameter

- ⇒ The entire installation, including the meter and the line between the meter and the transfer point, is emptied during shutdown periods.


In the filling phase of the meter and the installation, the delivery valve is closed. For reasons specific to the handling of CO₂, the installation is filled with gaseous CO₂ under pressure before being filled with liquid CO₂. When the gaseous CO₂ comes into contact with the liquid CO₂, it liquefies immediately.

- ⇒ The connection between the gaseous phases of the tank of the truck and the receiving tank is permitted if any flow from the delivery tank to the receiving tank through the gas circuit is prevented in a secure manner.

In this case, an additional hose is installed between the gaseous phases of the receiving and delivery tanks. The quantities of gas returned must be compensated.

- ⇒ If a printer device which does not benefit from any evaluation is associated with the electronic calculator-indicator device, a label stating that the printed data are not subject to the legal control shall be affixed in a visible manner on the printing device.
- ⇒ When the power supply of the measuring system is cut off, the flow is interrupted even when the pump is previously running.


NOTE: The pressure sensors are mounted without any hydraulic shock absorber.

ALL RECOMMENDATIONS ARE FOR REFERENCE ONLY		
THIS DOCUMENT IS THE PROPERTY OF ALMA. IT CAN BE NEITHER COPIED NOR COMMUNICATED TO ANY THIRD PARTIES WITHOUT ALMA AUTHORIZATION		
	INSTALLATION GUIDE DI 026 ENB CRYOTRONIQUE CO ₂	Units of measure: Length: mm Angle: degree (° ' ") Temperature: °C
	This document is available at www.alma-alma.fr	Page 7 / 23

3. PART LIST

EQUIPMENTS INCLUDED IN THE MEASURING SYSTEM DELIVERED BY ALMA				
Item	Equipment	Designation	Qty	Option*
1		CALCULATOR INDICATOR MICROCOMPT+ CRYOTRONIQUE WITH Bluetooth CONNECTION	1	●
		Wi-Fi CONNECTION (As an alternative to Bluetooth)		
		RFID SUPERVISOR KEY		
2		ADRIANE TURBINE METER DN50-50 CO2 PN40	1	
3		Pt100 TEMPERATURE PROBE – CT1001-Pe ATEX (Supplied with thermowell)	1	
4		2-ANTENNA BOX GSM AND GPS	1	●
5		KIT FOR MEASURING SYSTEM IDENTIFICATION PLATE (Plate and sealing device)	1	
Option*: equipment sold as an option by ALMA must be installed on the measuring system if required by the certificate.				

Non-contractual pictures

ALL RECOMMENDATIONS ARE FOR REFERENCE ONLY		
THIS DOCUMENT IS THE PROPERTY OF ALMA. IT CAN BE NEITHER COPIED NOR COMMUNICATED TO ANY THIRD PARTIES WITHOUT ALMA AUTHORIZATION		
	INSTALLATION GUIDE DI 026 ENB CRYOTRONIQUE CO2	Units of measure: Length: mm Angle: degree (° ' ") Temperature: °C
	This document is available at www.alma-alma.fr	Page 8 / 23

4. MICROCOMPT+



Document available on website [alma-alma.fr](http://www.alma-alma.fr)

ALL RECOMMENDATIONS ARE FOR REFERENCE ONLY

THIS DOCUMENT IS THE PROPERTY OF ALMA. IT CAN BE NEITHER COPIED NOR COMMUNICATED TO ANY THIRD PARTIES WITHOUT ALMA AUTHORIZATION



INSTALLATION GUIDE DI 026 ENB CRYOTRONIQUE CO2


This document is available at www.alma-alma.fr

Units of measure:
 Length: mm
 Angle: degree (° '' ''')
 Temperature: °C


Page 9 / 23

4.1. INSTALLATION RECOMMENDATIONS CALCULATOR-INDICATOR MICROCOMPT+


- Fasten the box with 4 M6 screws (holder suitable for vibrations and designed to support the MICROCOMPT). On the box: 4 M6 blind holes tapped length=12 over 185x132).
- Leave an open space around the box in order:
 - o To facilitate maintenance operation.
 - o To prevent any pressing on pushbuttons and on the glass.
- The space between the front face of the box and the cabinet door shall be sufficient.
- Dimensions: $A > 100\text{mm}$ and $B > 60\text{mm}$

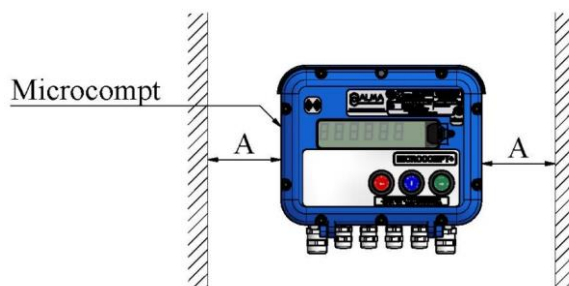

- SOLUTION 1: straight box if it's a breast height.




Left hand view
Closed box



Left hand view
open box

- SOLUTION 2: 20° angle if it's not at breast height.



Left hand view
Closed box



Left hand view
open box

REFER TO THE INSTRUCTION MANUAL
(DELIVERED WITH THE EQUIPMENT OR AVAILABLE ON ALMA WEBSITE)

ALL RECOMMENDATIONS ARE FOR REFERENCE ONLY


THIS DOCUMENT IS THE PROPERTY OF ALMA. IT CAN BE NEITHER COPIED NOR COMMUNICATED TO ANY THIRD PARTIES WITHOUT ALMA AUTHORIZATION



INSTALLATION GUIDE DI 026 ENB CRYOTRONIQUE CO2

This document is available at www.alma-alma.fr

Units of measure:
Length: mm
Angle: degree (° ' ")
Temperature: °C

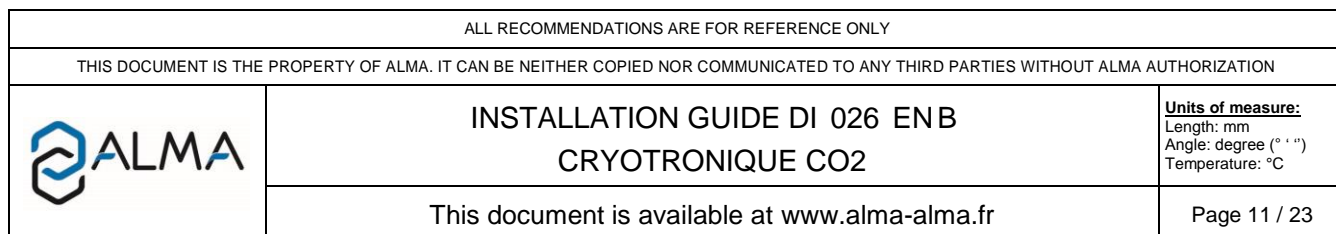


Terminal assignment of the power supply board

Any mass braids and shielding must be connected to the MICROCOMPT+ ground bar

TERMINAL ASSIGNMENT OF MICROCOMPT+ BOARDS

POWER SUPPLY BOARD

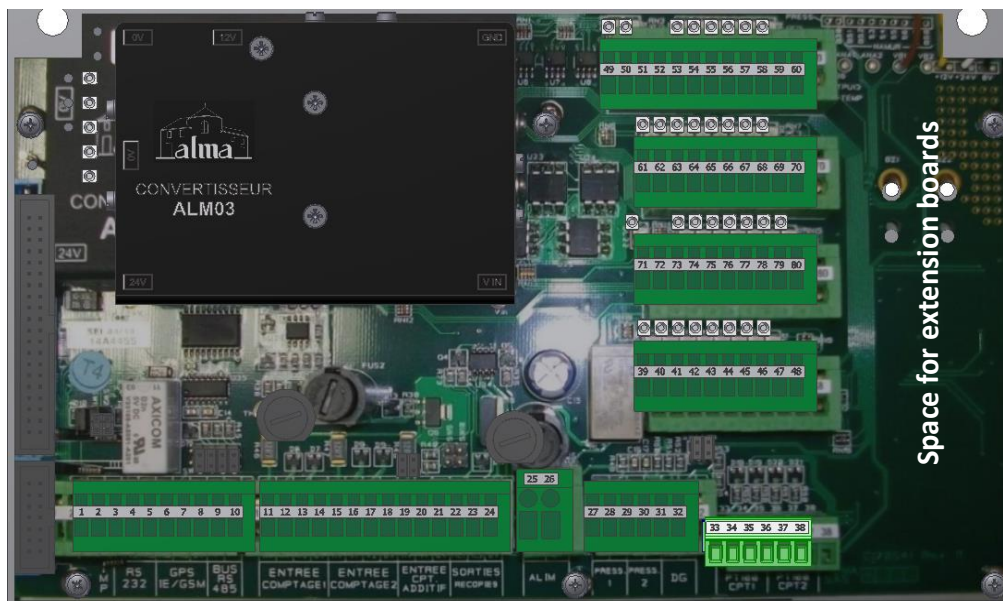

EQUIPMENTS CONNECTED TO THE MICROCOMPT+								POWER SUPPLY BOARD			
Option	Equipment	Cable (for information)				Function	Color or No.	Terminal	Function		Observation
		No.	CG*	Alma	Type						
	EMA TURBINE METER EMITTER	C2	1/2"NPT	●	ADR 4x0.34 sh.	12V	Jn	11	12V	METERING INPUT 1	Connect the shielding
						V1	Mr	12	V1		
						V2	Vt	13	V2		
						0V	Bc	14	0V		
	PULSES OUTPUT					Volume		22	RC1	PULSES OUTPUT	1p / scale
						Mass		23	RC2	PULSES OUTPUT	
						0V		24	0V		
	24VDC SUPPLY truck (battery)	A1	1/2"NPT		2x1	Bat. (+)	1	25	24VDC	SUPPLY 24VDC	
						Bat. (-)	2	26	0V		
	PRESSURE SENSOR PT1					+		27	+	PRESSURE PUMP SUCCION	Connect the shielding
						-		28	-		
	PRESSURE SENSOR PT2					+		29	+	PRESSURE PUMP OUTLET	Connect the shielding
						-		30	-		
●	PRESSURE SENSOR PT3					+		51	+	PRESSURE LIQUID	Connect the shielding
						-		59	-		
	PRESSURE SENSOR PT4					+		52	+	PRESSURE GAS RETURN	Connect the shielding
						-		60	-		

ALL RECOMMENDATIONS ARE FOR REFERENCE ONLY

THIS DOCUMENT IS THE PROPERTY OF ALMA. IT CAN BE NEITHER COPIED NOR COMMUNICATED TO ANY THIRD PARTIES WITHOUT ALMA AUTHORIZATION



INSTALLATION GUIDE DI 026 ENB CRYOTRONIQUE CO2

Units of measure:
Length: mm
Angle: degree (° ' ")
Temperature: °C


This document is available at www.alma-alma.fr

Page 12 / 23

Connection of the network board – Ethernet, RS232/485, CANBus


Connection to the Ethernet network:

- With the RJ45 connector according to the EIA/TIA-568 standard
- Or with the screw-terminal: see details in the table below.

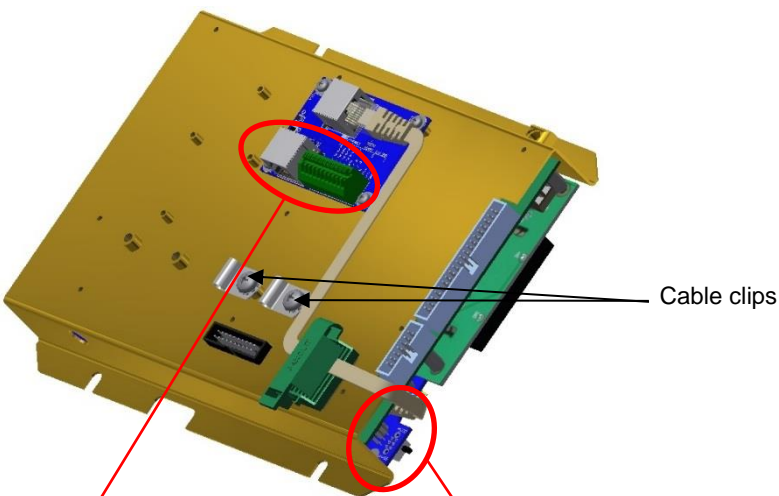

Cable clips

NETWORK BOARD

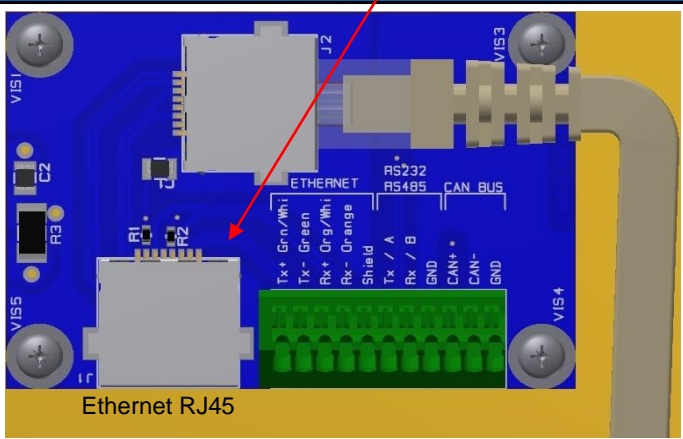

Ethernet RJ45

RS232 or RS485 Switch

NETWORK CONNECTION TYPE								NETWORK BOARD			
Option	Connection	Cable (for information)				Function	Coulor or No.	Coulor	Function		Observation
		No.	CG*	Alma	Type						
	ETHERNET NETWORK							Vt/Bc	Tx+	Ethernet	Or connection with RJ45 according to EIA/TIA- 568
								Vt	Tx-		
								Or/Bc	Rx+		
								Or	Rx-		
	RS232 or RS485							Tx / A	RS232 or RS485	Depending on the switch configuration See above	
								Rx / B			
								GND			
								CAN+			
	CANBus NETWORK							CAN-	CANBus		
								GND			

*Refer to the Cable Glands Installation Instructions

ALL RECOMMENDATIONS ARE FOR REFERENCE ONLY

THIS DOCUMENT IS THE PROPERTY OF ALMA. IT CAN BE NEITHER COPIED NOR COMMUNICATED TO ANY THIRD PARTIES WITHOUT ALMA AUTHORIZATION





INSTALLATION GUIDE DI 026 ENB CRYOTRONIQUE CO2


This document is available at www.alma-alma.fr

Units of measure:
Length: mm
Angle: degree (° ' ")
Temperature: °C

4.3. GSM/GPS MODULE EQUIPPED – 2-ANTENNA BOX

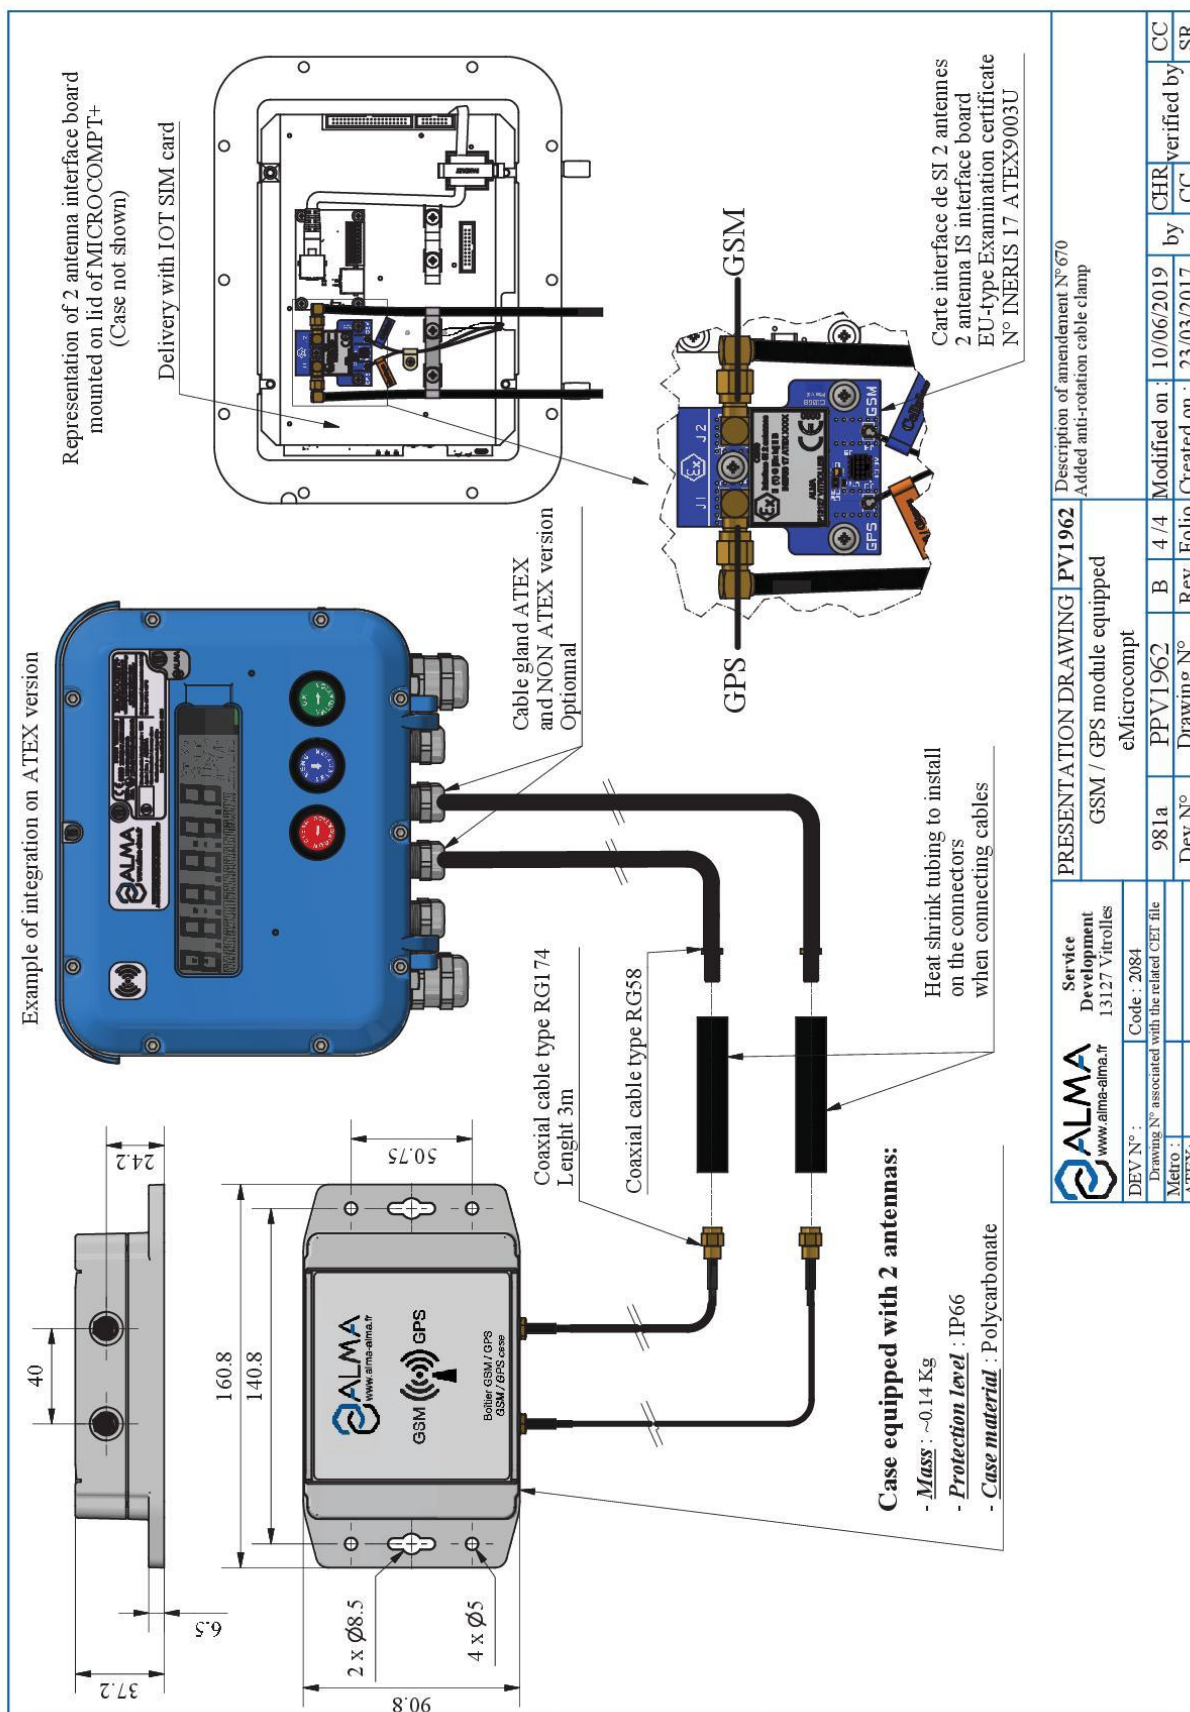




ALL RECOMMENDATIONS ARE FOR REFERENCE ONLY		
THIS DOCUMENT IS THE PROPERTY OF ALMA. IT CAN BE NEITHER COPIED NOR COMMUNICATED TO ANY THIRD PARTIES WITHOUT ALMA AUTHORIZATION		
	INSTALLATION GUIDE DI 026 ENB CRYOTRONIQUE CO2	<u>Units of measure:</u> Length: mm Angle: degree (° / °") Temperature: °C
	This document is available at www.alma-alma.fr	Page 17 / 23

Mounting of the GSM/GPS cables into the cable glands

ALMA connects the GSM and GPS antenna to the MICROCOMPT+ (2-antenna board).



At the outlet of the MICROCOMPT+ box, you must pass both cables through cable glands. In case of an ATEX MICROCOMPT+, cable glands must be ATEX.

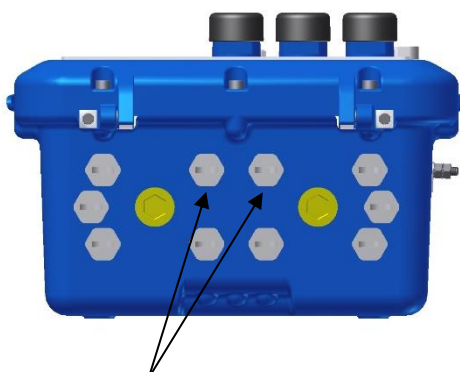

RECOMMENDED CABLE GLANDS
(FOR INFORMATION ONLY)

Into the MICROCOMPT+, adjust the cable length to easily open and close the cover. Make sure to prevent damage to the cable.

Tighten both cable glands.

Wiring of the 2-antenna box to the MICROCOMPT+

Fasten the box. You must install it in an area free of metallic cover to have a good reception and broadcasting of signal. You can install the box in a horizontal or vertical position.

Put each coaxial cable through the heat shrink sleeve.

Plug the RG58⁽¹⁾ cable from the MICROCOMPT+ with the RG174⁽²⁾ cable from the antenna box and tighten them. Isolate the male/female SMA connectors with the supplied heat shrink sleeve (both antennas in the box are the same, cables don't have to be labelled).

Position and heat up the sleeve on the connectors to prevent corrosion and humidity.



WARNING: The cables of this box can be **neither shortened nor extended**

⁽¹⁾ RG58: Semi-rigid coaxial cable, 5mm diameter

⁽²⁾ RG174: Flexible coaxial cable, 2.7mm diameter

ALL RECOMMENDATIONS ARE FOR REFERENCE ONLY

THIS DOCUMENT IS THE PROPERTY OF ALMA. IT CAN BE NEITHER COPIED NOR COMMUNICATED TO ANY THIRD PARTIES WITHOUT ALMA AUTHORIZATION



INSTALLATION GUIDE DI 026 ENB
CRYOTRONIQUE CO2

Units of measure:
Length: mm
Angle: degree (° ' ")
Temperature: °C

This document is available at www.alma-alma.fr

Page 18 / 23

5. ADRIANE TURBINE METER DN50-50 CO2 PN40

A preliminary cleaning is done on the Turbine

- *Mass*: ~ 7.8Kg,
- *Material*: Stainless steel
- *Flow rate*: from 4 to 43 m³/h
- *Liquids measured*: Liquefied carbon dioxide (CO₂),
- *Accuracy class*: 1.5

It is advisable to install upstream of the turbine a filter minimum 400µ

Document available on website alma-alma.fr

<div style="display: flex; flex-direction: column; align-items: center;"> <div>Service Development</div> <div>13127 Vitrolles</div> <div>www.alma-alma.fr</div> </div>		PRESENTATION DRAWING DFV149		Description of amendment N°							
		ADRIANE DN50-50 313		CO2 PN40							
Associated item	Codes	Plan	953b	PPV149	A	5 / 6	Modified on :	by	CC	verified by	ROC
2H00 pulse emitter	8145	PPV069									
2B00 pulse emitter	8147	PPV025									
			DEV N° : 953b	Code :							
			Drawing N° associated with the related CET file	LNE-34322							
			Metro :	ATEX:							

ALL RECOMMENDATIONS ARE FOR REFERENCE ONLY

THIS DOCUMENT IS THE PROPERTY OF ALMA. IT CAN BE NEITHER COPIED NOR COMMUNICATED TO ANY THIRD PARTIES WITHOUT ALMA AUTHORIZATION



INSTALLATION GUIDE DI 026 ENB CRYOTRONIQUE CO2


This document is available at www.alma-alma.fr

Units of measure:
 Length: mm
 Angle: degree (° ' ' ')
 Temperature: °C


Page 19 / 23

5.1. INSTALLATION AND SEALING RECOMMENDATIONS ADRIANE TURBINE METER

- The identification plate and the led of the pulse emitter(s) shall be visible and accessible.
- The turbine must be installed with respect to the flow direction.
- Put sealing rings each other sides between the turbine and the backflanges.
- Leave an open space all around the turbine in order to ease maintenance.
- Install a 400 μ filter (mini) on the pipe upstream from the turbine meter.
- After installation or during the commissioning period, if the new or modified pipes have not been perfectly cleaned or pickled and passivated, the turbine should be protected by a honeycomb sieve – max. 1mm mesh. It must be placed between two flanges upstream from the turbine.
- Dimensions: A > 100mm.

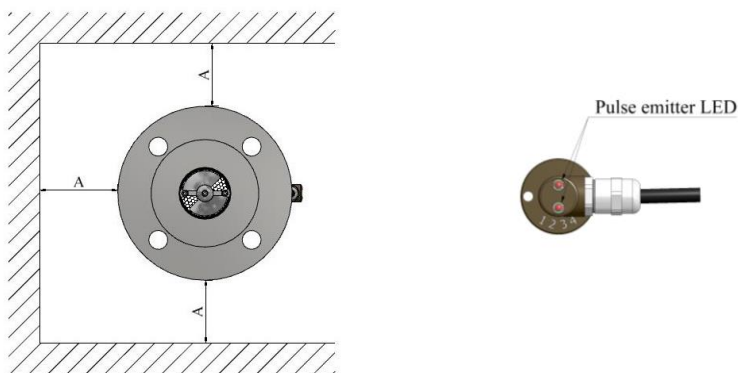

- Refer to the certificate written on the identification plate of the measuring system to suit the sealing requirements
- No loose lead wire on the sealing devices

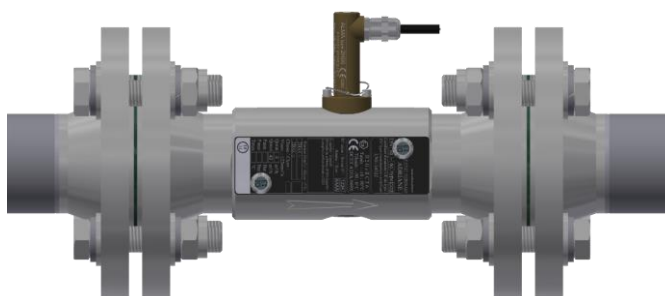

For accuracy class 0.5 and 1.0 measuring systems, the pipes and equipment upstream or downstream the turbine meter must have the same nominal diameter as the meter on a length at least equal to 10 times this diameter upstream and 5 times this diameter downstream.

These lengths can be straight or bent.

It is mandatory that no flowrate adjustment device (e.g. a variable-opening valve) is located upstream at a distance less than 10 times the nominal diameter of the meter: Do not create derivation circuits with sample or bypass, specially make sure that no nozzle is present on this pipe.

ALL RECOMMENDATIONS ARE FOR REFERENCE ONLY

THIS DOCUMENT IS THE PROPERTY OF ALMA. IT CAN BE NEITHER COPIED NOR COMMUNICATED TO ANY THIRD PARTIES WITHOUT ALMA AUTHORIZATION




INSTALLATION GUIDE DI 026 ENB CRYOTRONIQUE CO2

This document is available at www.alma-alma.fr

Units of measure:
Length: mm
Angle: degree (° ' ")
Temperature: °C

6. TEMPERATURE PROBE Pt100 – CT1001 ATEX

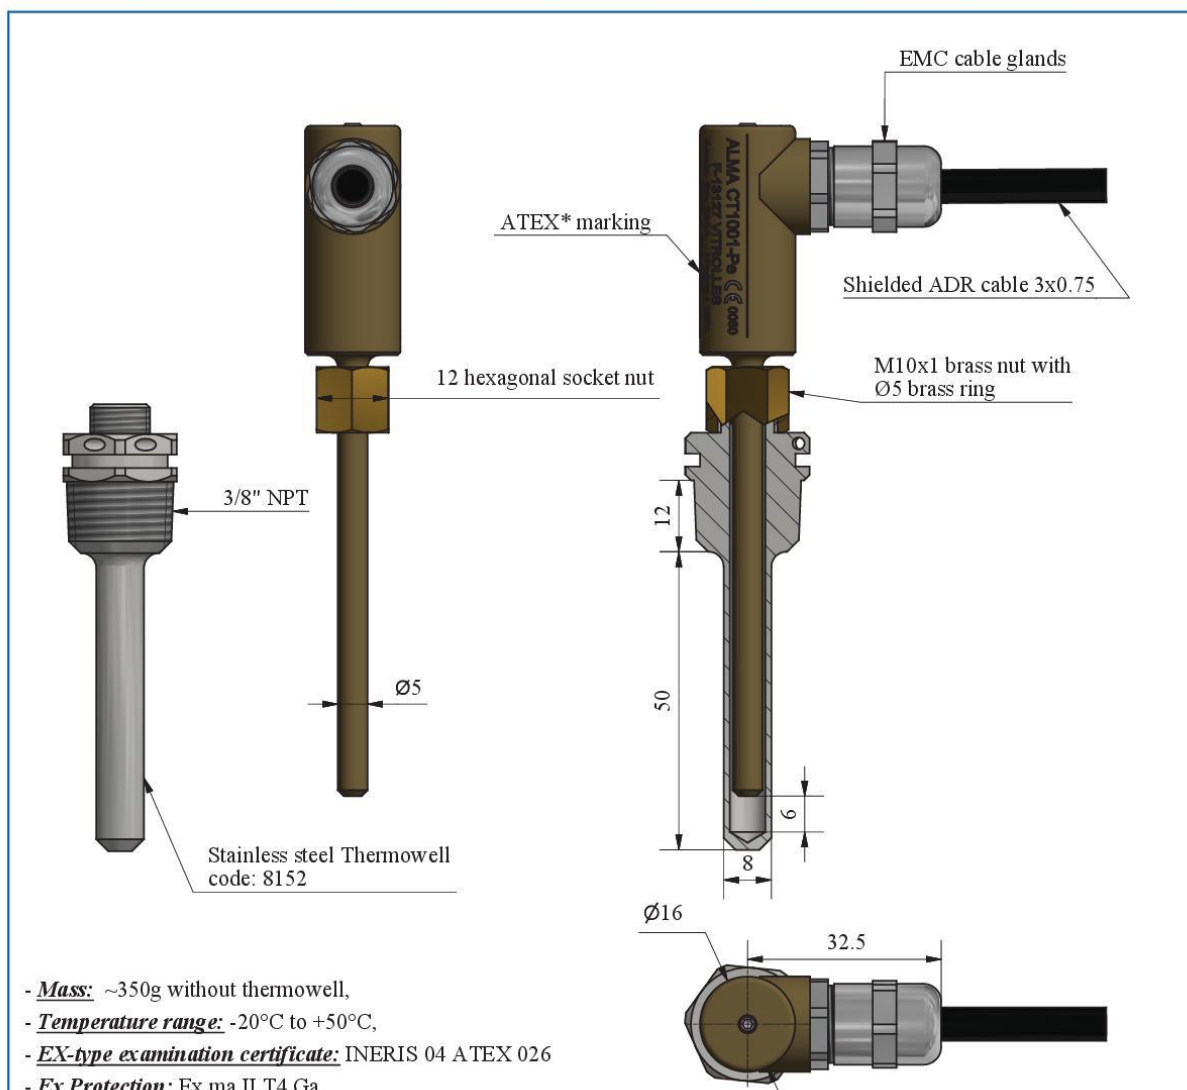

The sensor body is made of bronze color anodized aluminum alloy;
The ring and the nut are made of brass.
The probe can be mounted either on a ALMA thermowell or on a
thimble connection 1/4 "BSP (M10x1 n5).
Before installation, lubricate the parts in contact with the thermowell or
the boss, to prevent corrosion.

PT100 features:


- 3 wires
- 1/3 DIN

*ATEX "ma" certification.


For installation and use in hazardous areas see Instruction manual

Also available with output connector according to IEC 60947-5-2


Connecting the cable		
Function	Marking on the wire	Color wire
PT100/1	1	Yellow
PT100/2	2	White
PT100/3	3	Green

 Service Development 13127 Vitrolles		PRESENTATION DRAWING DFV042		Description of the amendment N°662 Removal of the apparent 5mm requirement on the wiring	
DEV N° : 949d Code : 8151		Temperature probe CT1001-Pe			
Drawing N° associated with the related CET file		949d	PPV042	L	5 / 6
Metro :		Dev N°	Drawing N°	Rev	Folio
ATEX :		INERIS 04 ATEX 0026		Modified on :	29/03/2019
				Created on :	13/09/2003
				by	CHR
				BM	verified by
				BM	CC
				BM	BM


Document available on website alma-alma.fr

ALL RECOMMENDATIONS ARE FOR REFERENCE ONLY		
THIS DOCUMENT IS THE PROPERTY OF ALMA. IT CAN BE NEITHER COPIED NOR COMMUNICATED TO ANY THIRD PARTIES WITHOUT ALMA AUTHORIZATION		
	INSTALLATION GUIDE DI 026 ENB CRYOTRONIQUE CO2	
	This document is available at www.alma-alma.fr	
		Units of measure: Length: mm Angle: degree (° ' ") Temperature: °C
		Page 21 / 23

6.1. INSTALLATION RECOMMENDATIONS TEMPERATURE PROBE

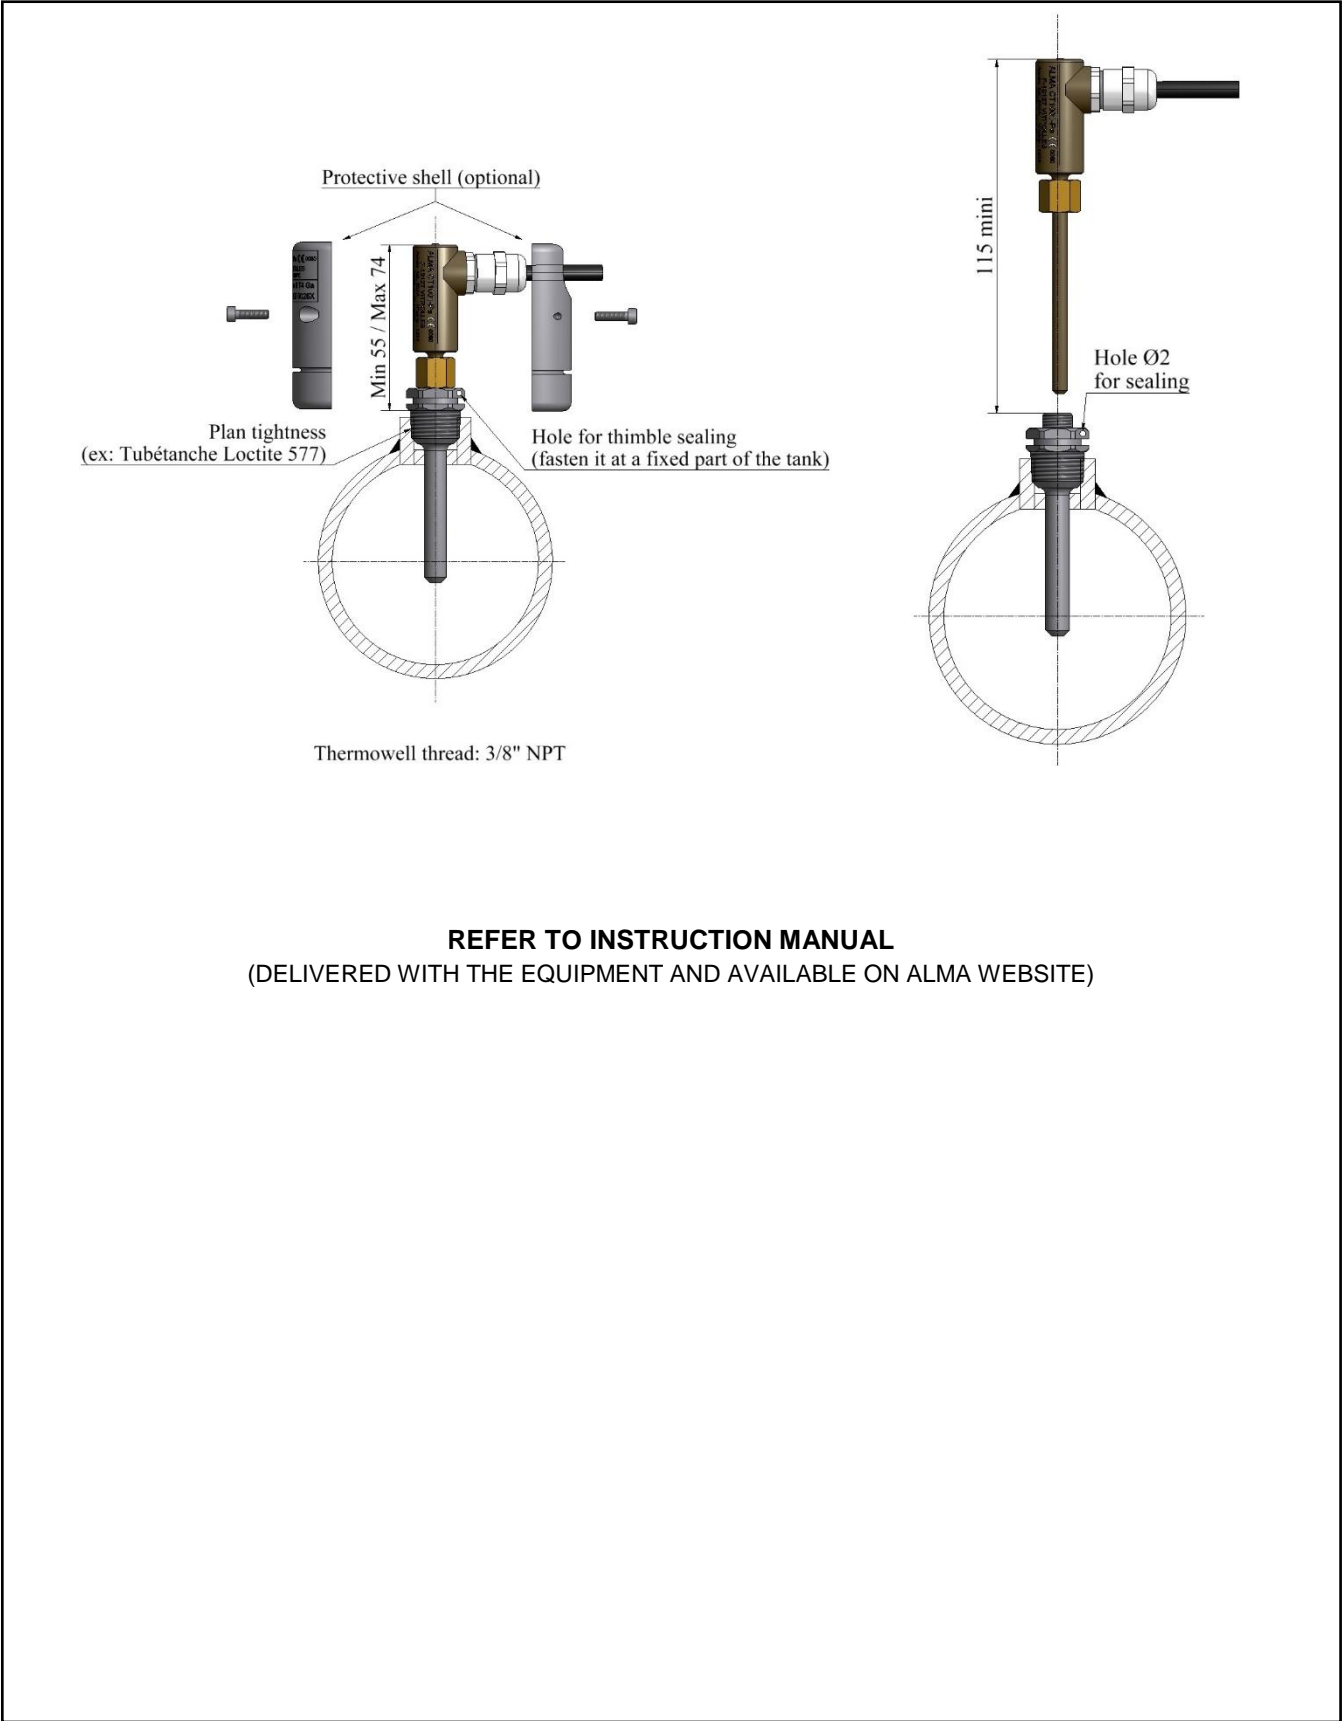


REFER TO INSTRUCTION MANUAL
(DELIVERED WITH THE EQUIPMENT AND AVAILABLE ON ALMA WEBSITE)

ALL RECOMMENDATIONS ARE FOR REFERENCE ONLY		
THIS DOCUMENT IS THE PROPERTY OF ALMA. IT CAN BE NEITHER COPIED NOR COMMUNICATED TO ANY THIRD PARTIES WITHOUT ALMA AUTHORIZATION		
	INSTALLATION GUIDE DI 026 ENB CRYOTRONIQUE CO2	Units of measure: Length: mm Angle: degree (° ' ") Temperature: °C
	This document is available at www.alma-alma.fr	Page 22 / 23

7. KIT FOR MEASURING SYSTEM IDENTIFICATION PLATE

The identification plate shall be clearly installed, near the associated indicator device, and of easy access in order to be able to read features and to stamp the regulatory marks.

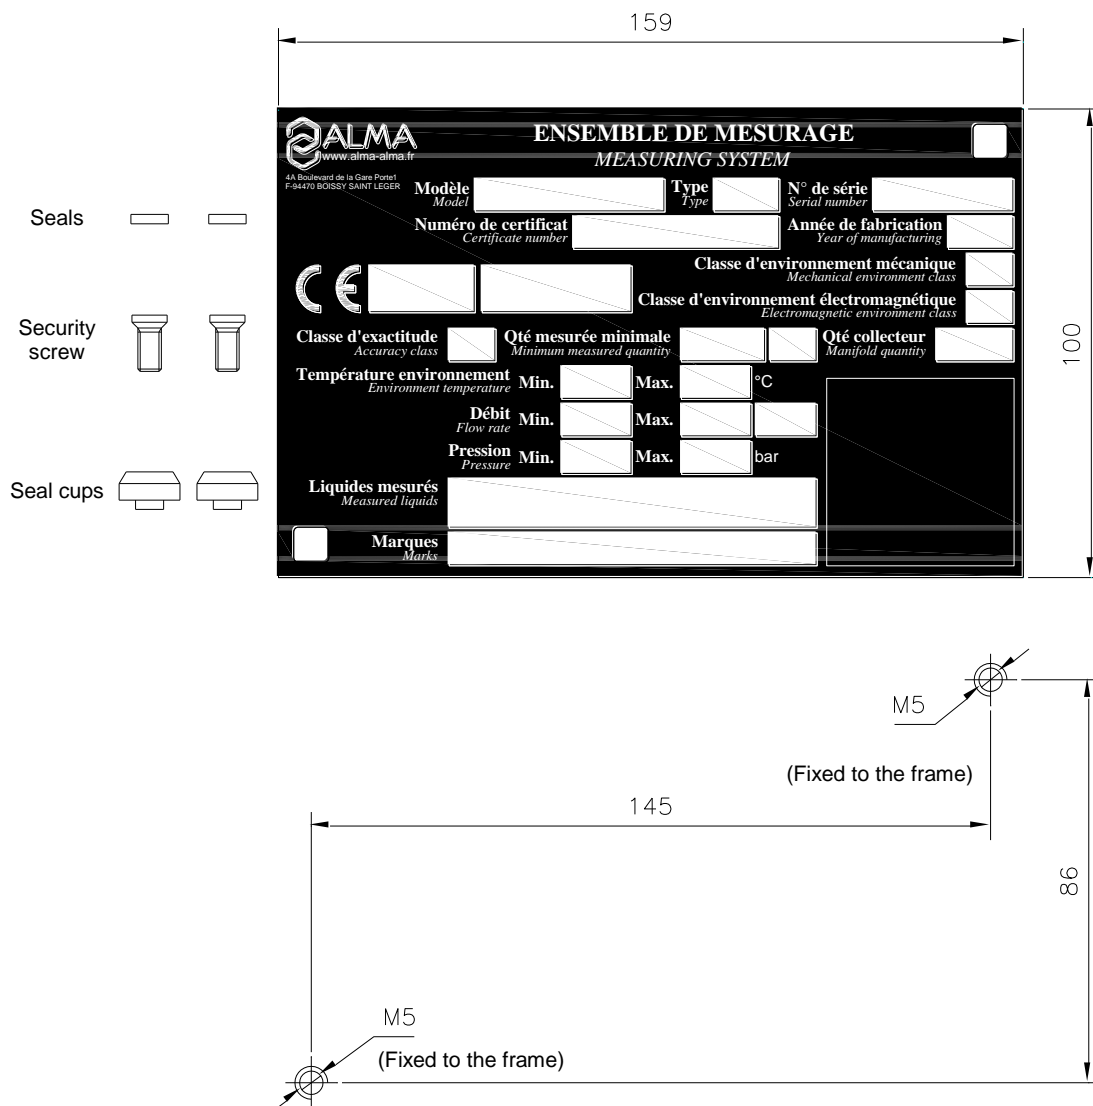

The security screws of the cups (provided by ALMA) must be screwed in the tap of the frame (do not use removable nuts).

ALL RECOMMENDATIONS ARE FOR REFERENCE ONLY

THIS DOCUMENT IS THE PROPERTY OF ALMA. IT CAN BE NEITHER COPIED NOR COMMUNICATED TO ANY THIRD PARTIES WITHOUT ALMA AUTHORIZATION



INSTALLATION GUIDE DI 026 ENB
CRYOTRONIQUE CO2

This document is available at www.alma-alma.fr

Units of measure:
Length: mm
Angle: degree (° ' ")
Temperature: °C

Page 23 / 23